

Assessing the Impact of an Organic Restoration Structure on Boat Wake Energy

Authors: Ellis, Jean T., Sherman, Douglas J., Bauer, Bernard O., and Hart, Jeffrey

Source: Journal of Coastal Research, 36(sp1) : 256-265

Published By: Coastal Education and Research Foundation

URL: <https://doi.org/10.2112/1551-5036-36.sp1.256>

BioOne Complete (complete.BioOne.org) is a full-text database of 200 subscribed and open-access titles in the biological, ecological, and environmental sciences published by nonprofit societies, associations, museums, institutions, and presses.

Your use of this PDF, the BioOne Complete website, and all posted and associated content indicates your acceptance of BioOne's Terms of Use, available at www.bioone.org/terms-of-use.

Usage of BioOne Complete content is strictly limited to personal, educational, and non - commercial use. Commercial inquiries or rights and permissions requests should be directed to the individual publisher as copyright holder.

BioOne sees sustainable scholarly publishing as an inherently collaborative enterprise connecting authors, nonprofit publishers, academic institutions, research libraries, and research funders in the common goal of maximizing access to critical research.

Assessing the Impact of an Organic Restoration Structure on Boat Wake Energy

Jean T. Ellis[†], Douglas J. Sherman[†], Bernard O. Bauer[‡], and Jeffrey Hart[∞]

[†]Department of Geography, Texas A&M University, College Station, TX 77843-3147.

[‡]Department of Geography, University of Southern California, Los Angeles, CA 90089-0255.

Habitat Assessment and Restoration Team, Inc., 13737 Grand Island Road, Walnut Grove, CA95690.

jean@geog.tamu.edu.

ABSTRACT



Erosion of unprotected levee banks decreases their structural integrity and increases the likelihood of failure. Several types of restoration structures for levee protection and stabilization have been used in the Sacramento–San Joaquin River Delta, California, to reduce erosion. The purpose of this paper is to describe the results of a field experiment designed to measure the effectiveness of organic restoration structures (brush bundles) in altering the hydrodynamic regime in the vicinity of levees, with specific focus on changes in boat wake energy. Two simple hypotheses were tested: 1) restoration structures reduce boat wake energy, and 2) energy reduction is dependent on water depth. Field work was conducted August 29–31, 2000 on Georgiana Slough, which is a tidally influenced (spring tidal range of 2 meters) distributary of the Sacramento River. Pressure sensors were deployed offshore and landward of the restoration structures. Data collection occurred with the bundles in place and with them removed. Boat wakes were generated during rising and falling tides to capture the effects of fluctuating water levels. Wakes were characterized by index wave height, period and energy. Comparing sample means of normalized energy with the bundles removed and with the bundles in place revealed a 60% reduction of energy by the bundles. It was also determined that energy reduction was tidally, or depth dependent. The reduction of energy by the structures indicates that they are an effective method to protect against boat-wake induced, levee erosion.

ADDITIONAL INDEX WORDS: *Sacramento-San Joaquin River Delta, levee erosion*

INTRODUCTION

Sacramento-San Joaquin River Delta

The Sacramento-San Joaquin River Delta, east of San Francisco, is a prominent geographical feature of California (Figure 1). Formed during the Holocene sea level rise by the confluence of the Sacramento and San Joaquin Rivers, the Delta is not always classified as a ‘true’ delta because of its inland location. However, the channel behavior and morphology are similar to deltas worldwide (MOUNT, 1995).

The Delta’s natural and engineered waterways and interspersed islands support agriculture, urbanization, industry, recreation and the natural environment (CADWR, 1995). An extensive network of levees is critical to protect the low-lying lands from flooding. However, land subsidence, boat wake and wind wave erosion, animal activity and tractive forces from channel and flood flows erode unprotected levee banks. Decreasing levee integrity is evidenced along unprotected banks by cut banks and scallops (arcuate embayments) in levees. A recent strategy to restore the eroding levees was developed by a consulting company, the Habitat Assessment and Restoration Team, Inc. This group constructed and emplaced a number of

organic structures (brush bundles) along the eroding levee banks of north Georgiana Slough. The structures are one example of vegetative stabilization, a common response to mitigate levee erosion (BARSDALE, 1960; ALLEN and LEECH, 1997; BOUMANS *et al.*, 1997; LEE *et al.*, 1997). Brush bundles offer advantages over conventional armoring, such as rip-rap. The bundles are porous and therefore allow sedimentation during flood and normal flow conditions. They are relatively inexpensive, are designed to allow the system to repair itself and are more visually appealing than armoring.

Levee erosion in the Sacramento-San Joaquin River Delta is caused by tractive forces from the river flow, wind waves and boat-generated waves. Benchmark studies of erosion in the Delta include those by COLLINS and NODA (1971), LIMERINOS and SMITH (1975), FODA (1995), and FODA *et al.* (1999). These four studies quantified erosive potential of river flow, wind waves, and boat-generated waves by estimating the total energy from each source dissipated on levee banks. It was suggested that boat wakes in non-flow dominated channels of the Delta contribute the largest amount of erosive energy to levee banks (LIMERINOS and SMITH, 1975; FODA, 1995; FODA *et al.*, 1999).

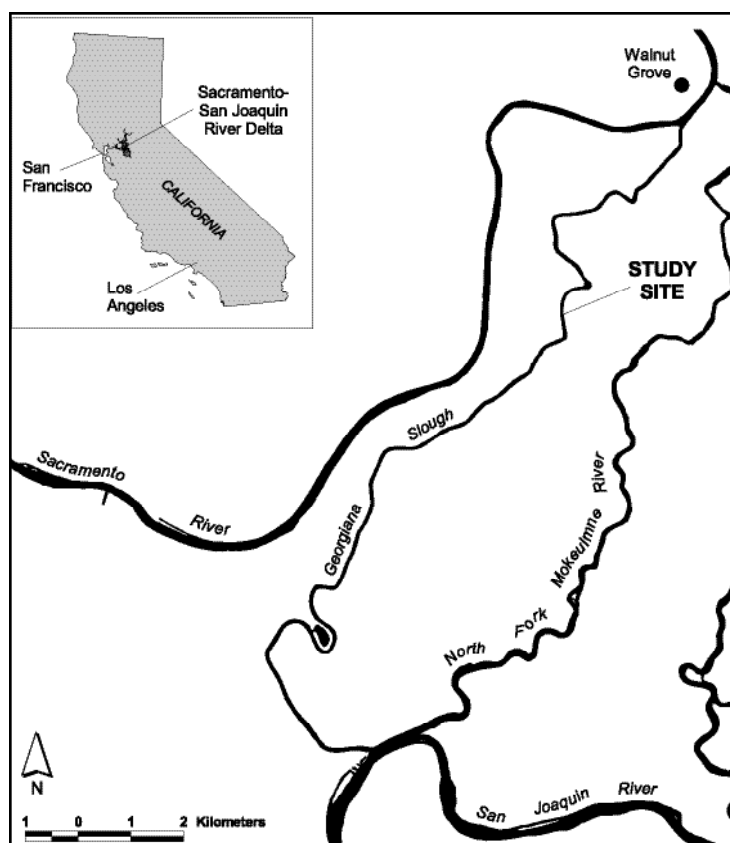


Figure 1. General location of the study site along Georgiana Slough in the Sacramento-San Joaquin River Delta (38° 12' 16.630N, 121° 32' 26.244W).

Energy Dissipation Through Structures

Previous work has examined energy dissipation through various coastal protective structures. WALTHER and LEE (1975) and MASSEL and BUTOWSKI (1980) examined the hydrodynamic effects of porous breakwaters. FONSECA and CAHALAN (1992) and KOBAYASHI *et al.* (1992) considered wave energy dissipation through sea grass and MASSEL *et al.* (1999) considered dissipation through mangrove forests. In addition, research has been conducted to quantify wave interaction, transformation and energy reduction over coral reefs (ROBERTS *et al.*, 1975 and 1992; ROBERTS and SUHAYDA, 1983; LUGO-FERNÁNDEZ *et al.*, 1998 and 1998a).

Several methods have been used to quantify energy reduction. ROBERTS *et al.* (1975), WALTHER and LEE (1975), and ROBERTS and SUHAYDA (1983) used spectral energy density and LUGO-FERNÁNDEZ *et al.* (1998; 1998a) and ROBERTS *et al.* (1992) calculated a wave transmission coefficient. FONSECA and CAHALAN (1992), ROBERTS *et al.* (1992), and LUGO-FERNÁNDEZ *et al.* (1998; 1998a) quantified energy reduction, E_{red} ,

using changes of wave height, and calculated a corresponding energy reduction:

$$E_{red} = \frac{E_{in} - E_{out}}{E_{in}} \times 100 \quad (1)$$

where the subscripts *in* and *out* indicate conditions onshore and offshore of the coral reefs, respectively, and H is wave height. It is assumed that H^2 in Eq. 1 is equivalent to energy density:

$$E = 1/8 \rho g H^2 \quad (2)$$

where ρ is fluid density, and g is gravity.

ROBERTS and SUHAYDA (1983) and LUGO-FERNÁNDEZ *et al.* (1998; 1998a) found that energy reduction over coral reefs is depth (tidally) dependent with 6%-20% more energy dissipated at low tide than at high tide. KOBAYASHI *et al.* (1992) and DUBI and TORUM (1996) also suggested that energy reduction was depth dependent in their studies of wave attenuation through sea grasses and kelp, respectively, but did not quantify the reduction.

Boat Wake Studies

Boat wake studies have focused on wave height differences for various vessel types (JOHNSON, 1958 and 1968; BREBNER *et al.*, 1966; SORENSEN, 1967 and 1973; HEY, 1968; PARNELL, 1996), boat-wake induced erosion (COLLINS and NODA, 1971; LIMERINOS and SMITH, 1975; OSBORNE and BOAK, 1999), and boat and wind wave comparisons (HEY, 1968; BHOWMIK *et al.*, 1982). In these studies, wave height was an important parameter in defining the characteristics of a wake event. For example, several used maximum wave height, the largest trough to crest distance in a wake train, to characterize a boat passage (SORENSEN, 1967 and 1973; HEY, 1968; JOHNSON, 1968; PARNELL, 1996). LIMERINOS and SMITH (1975), NANSON *et al.* (1994), and PARNELL (1996) calculated wave energy (Eq. 2) using maximum, or as LIMERINOS and SMITH termed it, index wave height. COLLINS and NODA (1971) and FODA (1995) also used linear wave theory to quantify energy using the energy density equation (Eq. 2).

Reduction Through Organic Structures

Several studies have previously described organic structures (ALLEN and LEECH, 1997; BOUMANS *et al.*, 1997; LEE *et al.*, 1997; CHEN, 1998), investigated energy dissipation through structures (WALTHER and LEE, 1975; KOBAYASHI *et al.*, 1992; LUGO-FERNÁNDEZ *et al.*, 1998), or evaluated the hydrodynamics of boat wakes (JOHNSON, 1968; SORENSEN, 1973; NANSON *et al.*, 1994). Only BOUMANS *et al.* (1997) integrated the three approaches with their investigation of boat wake reduction in the presence of organic structures. Those structures, called intertidal fences, were composed of bundled Christmas trees located offshore from a bank and secured to the bed with wooden posts. BOUMANS *et al.* (1997) reported a wave energy reduction of 50% using linear regression of the incident (offshore of the fences) versus transmitted (onshore of the fences) waves.

This study investigates boat-wake energy dissipation through organic restoration structures located along eroding levee banks of the Sacramento-San Joaquin River Delta. Boat wakes are commonly perceived as causing significant levee erosion in this region. The deployment of brush bundles, strawbales wrapped in coir, is becoming a widespread mitigation strategy to protect the levees against the erosion. However, there has been no controlled experimentation to measure the efficacy of these structures. This project investigated two hypotheses: 1) that restoration structures reduce boat wake energy substantially, and 2) that energy reduction is depth dependent.

EXPERIMENTAL DESIGN

The study location is in the northern portion of the Sacramento-San Joaquin River Delta, along the unprotected levee banks of Georgiana Slough (Figure 1). Georgiana Slough originates on the Sacramento River, south of the city of Walnut Grove, CA and extends approximately 18.5 km before merging with the San Joaquin River. The reach of the slough containing the study site is relatively straight, averages 5-7 meters in depth, and 45-75 meters in width with a 0.0003% slope (INTER-FLUVE, INC., 1999). The banks are vegetated or consist of exposed sediment.

The study site was a scallop in the eastern levee bank located approximately 7.2 kilometers downstream from Walnut Grove. The scallop was 4.2 meters wide longshore and 5.8 meters from the outer edge of the opening to its apex (Figure 2a). Two rows of bundles were placed across the opening of the scallop (Figure 2b). The outer portion of the structure was placed along the original levee bank margin. Bundles were stacked between wooden posts, with their crests 1 meter above the bed. The second, onshore portion of the restoration structure, consisted of two freestanding brush bundles.

Pressure transducers were deployed at three locations offshore and three locations onshore of the bundles in triangular configurations (Figure 2). Each pressure transducer (PT) was named to correspond with its location relative to the other PTs and the bundles (e.g., downstream inner). All instruments were mounted on PVC pipe that was driven into the bed. The inner PTs were mounted at the same height relative to each other and the outer PTs were also mounted at the same height relative to each other (Figure 3). This paper only considers data obtained from the downstream and upstream pairs of pressure transducers. The pairs were centered around the bundles at a 2.5 meter spacing.

Data collection occurred during August 29-31, 2000. To isolate the effectiveness of the bundles, the experiment was conducted with the bundles in place on 8/29 and 8/30 (AM) and again on 8/30 (PM) and 8/31 with the bundles removed to establish the control conditions. Data collection occurred during different water levels under each scenario to assess depth effects on energy reduction. A data acquisition system was configured to record signals from the instruments at a sampling interval of five hertz.

Thirty-one usable data sets were obtained. Each data set included an upstream and downstream boat passage. A 21-foot jet boat was used for data sets with the bundles in place and a 19-foot outboard motor boat was used for the control scenario. Under both scenarios the boat traveled approximately 27 km/hr. The bundles were in place for 36 boat-wake events, whereas 26 boat-wake events occurred under the control scenario.

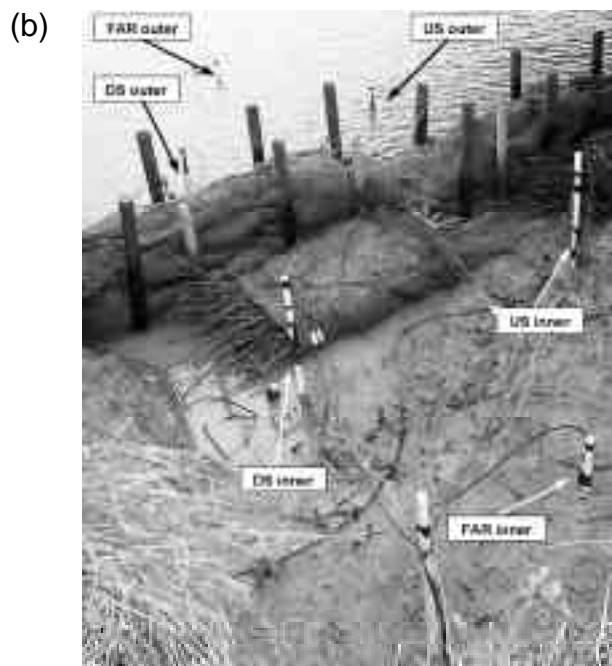
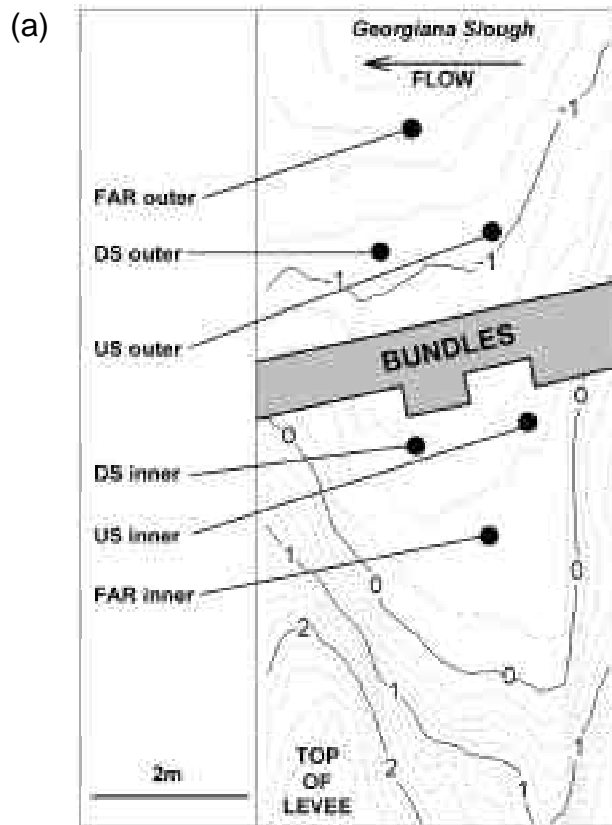


Figure 2. (a) Morphology of the study site. Contour labels are in meters. Pressure sensor locations and general bundle locations are shown. (b) The study site with the bundles in place at low tide. Note the lower bundle crest offshore from the upstream inner PT.

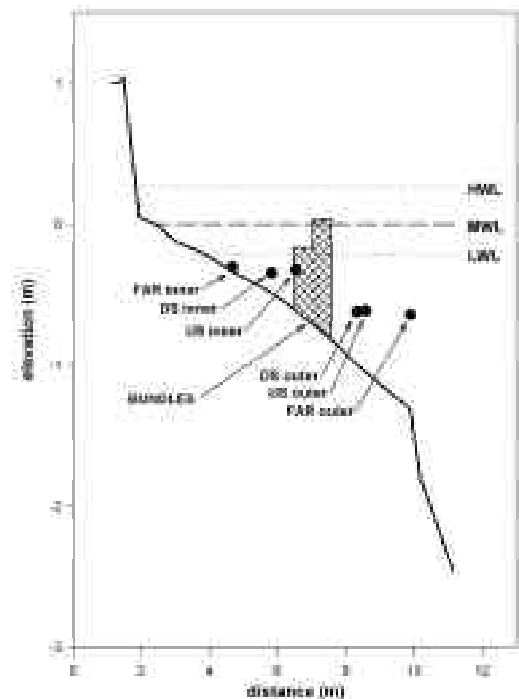


Figure 3. The profile through the study site that depicts PT elevations and mean water level (MWL). High water level (HWL), low water level (LWL), and MWL refer to levels observed during the study period.

The PT time series were reduced by characterizing each boat wake event (i.e. two per data set) by index wave height and period. Index wave height was calculated from the linear average of the largest two consecutive crest to trough differences after the arrival of the wake. This is the same method used by NANSON *et al.* (1994). Index wave period is the time over which the index wave occurred. Lastly, index wave heights were corrected for depth attenuation of the pressure signal using techniques outlined by NIELSEN (1989), DEAN and DALRYMPLE (1984) and KAMPHUIS (2000).

RESULTS

Tables 1 and 2 show the results of the experiments under the bundle and control conditions. Both tables show index wave height, H_i , index wave period, T_i , and water depth, h , for each boat passage. At the inner locations, average index wave height, \bar{H}_i , was larger for the control scenario (0.17m) than for the bundle scenario (0.11m). At the outer instruments was smaller under the control scenario (0.17m) than with the bundles in place (0.20m). The 0.03m difference between the average index wave heights at the outer stations is a result of the different boat types, speeds,

Table 1. Summary statistics for boat runs with bundles in place. Each boat passage shows index wave height, H_i , index wave period, T_i , and water depth at the instrument, h , for the DS and US outer and inner PTs.

Date	Time	DS outer			US outer			DS inner			US inner		
		Hi (m)	Ti (s)	h (m)	Hi (m)	Ti (s)	h (m)	Hi (m)	Ti (s)	h (m)	Hi (m)	Ti (s)	h (m)
8/29/00	16:07	0.22	1.8	0.85	0.17	2.4	0.85	0.09	1.8	0.49	0.07	2.4	0.21
		0.16	2.0	0.85	0.17	2.0	0.85	0.04	2.0	0.49	0.14	2.0	0.21
	16:31	0.17	2.6	0.93	0.14	2.6	0.92	0.08	2.6	0.57	0.10	2.6	0.28
		0.17	2.2	0.93	0.19	1.8	0.92	0.09	2.2	0.57	0.15	1.8	0.28
	17:05	0.24	1.8	1.00	0.18	2.2	0.99	0.13	1.8	0.65	0.11	2.2	0.35
		0.23	1.8	1.00	0.19	2.0	0.99	0.11	1.8	0.65	0.14	2.0	0.35
	17:35	0.14	2.0	1.06	0.16	2.0	1.05	0.11	2.0	0.72	0.09	2.0	0.41
		0.21	1.6	1.06	0.21	1.6	1.05	0.13	1.6	0.72	0.13	1.6	0.41
	18:01	0.14	2.0	1.10	0.14	2.2	1.09	0.12	2.0	0.76	0.10	2.2	0.44
		0.18	2.0	1.10	0.15	2.2	1.09	0.09	2.0	0.76	0.15	2.2	0.44
8/30/00	7:39	0.19	2.6	1.13	0.23	1.8	1.13	0.14	2.6	0.80	0.15	1.8	0.49
		--	--	--	0.20	1.8	1.13	0.17	1.6	0.80	0.14	1.8	0.49
	7:54	0.12	3.0	1.23	0.18	2.0	1.22	0.11	3.0	0.90	0.13	2.0	0.56
		0.30	1.8	1.23	0.24	2.0	1.22	0.24	1.8	0.90	0.15	2.0	0.56
	8:02	0.18	2.4	1.20	0.19	2.0	1.19	0.14	2.4	0.86	0.15	2.0	0.53
		0.25	2.0	1.20	0.20	2.2	1.19	0.17	2.0	0.86	0.16	2.2	0.53
	8:20	0.22	2.4	1.17	0.23	2.2	1.16	0.15	2.4	0.82	0.13	2.2	0.51
		0.24	2.0	1.17	0.26	1.8	1.16	0.16	2.0	0.82	0.18	1.8	0.51
	8:40	0.18	2.6	1.14	0.22	2.2	1.13	0.14	2.6	0.79	0.12	2.2	0.48
		0.26	1.8	1.14	0.19	2.2	1.13	0.16	1.8	0.79	0.16	2.2	0.48
	9:02	0.20	2.2	1.09	0.17	2.4	1.08	0.15	2.2	0.74	0.13	2.4	0.43
		0.20	2.0	1.09	0.20	2.0	1.08	0.16	2.0	0.74	0.17	2.0	0.43
	9:24	0.36	1.6	1.03	0.20	2.4	1.02	0.18	1.6	0.68	0.14	2.4	0.37
		0.18	2.2	1.03	0.20	2.0	1.02	0.13	2.2	0.68	0.17	2.0	0.37
	9:46	0.12	2.6	0.99	0.17	2.0	0.98	0.09	2.6	0.63	0.11	2.0	0.33
		0.19	2.0	0.99	0.20	2.0	0.98	0.12	2.0	0.63	0.15	2.0	0.33
	10:06	0.16	2.6	0.94	0.14	2.6	0.94	0.08	2.6	0.59	0.09	2.6	0.29
		0.21	1.8	0.94	0.18	2.0	0.94	0.09	1.8	0.59	0.12	2.0	0.29
	10:26	0.23	1.6	0.90	0.24	1.6	0.90	0.09	1.6	0.55	0.11	1.6	0.25
		0.26	1.8	0.90	0.20	2.0	0.90	0.07	1.8	0.55	0.16	2.0	0.25
	10:48	0.28	1.6	0.86	0.19	2.6	0.86	0.09	1.6	0.50	0.08	2.6	0.21
		0.24	1.8	0.86	0.17	2.2	0.86	0.06	1.8	0.50	0.15	2.2	0.21
	11:11	0.25	1.6	0.81	0.16	2.8	0.81	0.08	1.6	0.45	0.07	2.8	0.17
		0.17	2.2	0.81	0.16	2.4	0.81	0.05	2.2	0.45	0.13	2.4	0.17
	11:32	0.17	2.4	0.76	0.19	2.4	0.77	0.06	2.4	0.40	0.05	2.4	0.13
		0.20	2.0	0.76	0.22	1.8	0.77	0.04	2.2	0.40	0.12	1.8	0.13

and water levels. To adjust for these factors, the inner wake height measurements were normalized relative to the outer, or input, wake height.

One of the objectives of this study was to compare wake energy inside and outside of the bundles. Therefore, for each pair of PTs normalized energy density, E_n , was obtained using:

$$E_n = \frac{(H_i \text{ inner})^2}{(H_i \text{ outer})^2} \quad (3).$$

Normalizing energy density compares pairs of ‘inner and outer’ PTs under the control and bundle scenarios, and provides a standardized basis for assessing potential impacts of the bundles. Using this method, normalized energy densities larger than 1.0 indicate a greater inner energy and values less than 1.0 indicate a greater outer energy. Figure 4 shows the distributions of E_n for the control and bundle conditions. Under the control conditions energy is frequently greater at the inner PT than at the outer PT ($E_n > 1$). There is one instance at the upstream pair where the wave energy doubled from the outer to inner location

Table 2. Summary statistics for boat runs with the bundles removed. Each boat passage shows index wave height, H_i , index wave period, T_i , and water depth at the instrument, h , for the DS and US outer and inner PTs.

Date	Time	DS outer			US outer			DS inner			US inner		
		Hi (m)	Ti (s)	h (m)	Hi (m)	Ti (s)	h (m)	Hi (m)	Ti (s)	h (m)	Hi (m)	Ti (s)	h (m)
8/30/00	16:57	0.20	1.6	0.85	0.19	1.8	0.86	0.16	1.6	0.50	0.23	1.8	0.25
		0.23	1.8	0.85	0.19	2.0	0.86	0.18	1.8	0.50	0.24	2.0	0.25
	17:20	0.12	1.8	0.90	0.11	2.0	0.90	0.10	1.8	0.55	0.15	2.0	0.30
		0.22	1.6	0.90	0.18	1.8	0.90	0.17	1.6	0.55	0.22	1.8	0.30
	17:30	0.20	1.8	0.93	0.18	2.0	0.93	0.20	1.8	0.58	0.15	2.0	0.33
		0.20	1.8	0.93	0.17	1.8	0.93	0.15	1.8	0.58	0.23	1.8	0.33
	17:50	0.18	1.6	0.98	0.18	1.8	0.98	0.18	1.6	0.63	0.18	1.8	0.38
		0.21	1.6	0.98	0.20	1.6	0.98	0.16	1.6	0.63	0.13	1.6	0.38
	18:12	0.14	2.0	0.95	0.23	1.6	1.02	0.16	2.0	0.67	0.18	1.6	0.43
		0.24	1.6	0.95	0.22	1.6	1.02	0.20	1.6	0.67	0.22	1.6	0.43
	8:20	0.21	2.0	1.15	0.17	2.2	1.14	0.23	2.0	0.80	0.18	2.2	0.56
		0.14	1.8	1.15	0.11	1.8	1.14	0.15	1.8	0.80	0.15	1.8	0.56
8/31/01	8:50	0.19	2.0	1.09	0.24	1.8	1.09	0.18	2.0	0.75	0.18	1.8	0.51
		0.09	2.0	1.09	0.08	2.0	1.09	0.11	2.0	0.75	0.09	2.0	0.51
	8:56	0.13	2.4	1.09	0.15	2.0	1.09	0.07	2.4	0.75	0.16	2.0	0.51
		0.20	1.6	1.09	0.09	2.4	1.09	0.17	1.6	0.75	0.10	2.4	0.51
	9:27	0.12	2.2	1.04	0.17	1.8	1.04	0.12	2.2	0.70	0.15	1.8	0.46
		0.13	1.8	1.04	0.13	1.8	1.04	0.15	1.8	0.70	0.14	1.8	0.46
	10:00	0.14	1.8	0.97	0.17	2.4	0.97	0.13	1.8	0.62	0.19	2.4	0.40
		--	--	--	0.20	1.6	0.97	0.21	1.6	0.62	0.18	1.6	0.40
	10:32	0.17	1.6	0.96	0.14	2.0	0.90	0.12	1.6	0.54	0.15	2.0	0.33
		0.22	1.6	0.96	0.27	1.4	0.90	0.16	1.6	0.54	0.23	1.4	0.33
	11:00	0.14	2.4	0.89	0.16	2.2	0.83	0.15	2.4	0.48	0.19	2.2	0.26
		0.24	1.8	0.89	0.17	1.8	0.83	0.15	1.8	0.48	0.24	1.8	0.26
	11:20	0.13	2.2	0.89	0.17	2.0	0.83	0.14	2.2	0.44	0.20	2.0	0.26
		0.22	2.0	0.89	0.20	1.8	0.83	0.15	2.0	0.44	0.24	1.8	0.26

($E_n=2$). When the bundles were in place, the outer wave energy was consistently larger than the inner wave energy ($E_n<1$). The average energy ratios under the control scenario were 0.84 for the downstream pair and 1.20 for the upstream pair. The average energy ratios with the bundles in place were 0.34 for the downstream pair and 0.48 for the upstream pair.

Finally, we averaged the inner PT records and normalized them by the averaged outer records (Eq. 3). This yielded overall ratios of 1.02 for control conditions and 0.41 with the bundles in place. Similarly, averaged data were used for subsequent analysis so that spatial comparisons could be made between inner and outer conditions.

DISCUSSION

In order to test the first hypothesis, that the brush bundles reduce energy, the sample means of the control and bundle data sets were compared using Student's t-test. A pre-requisite for the t-test is that the sample is normally

distributed. Normality was tested using the chi-square test, and in all cases the results suggested that this condition was met. It was assumed that the background populations of the samples had equal standard deviations. The results of the t-test indicate that the mean energy-density ratios are significantly different ($p < 0.01$), and therefore, it is concluded that the brush bundles reduce energy. However, this finding does not quantify the magnitude of the impact. The change in energy, E , may be calculated using:

$$E = \left(1 - \frac{\bar{E}_n \text{ bundle}}{\bar{E}_n \text{ control}} \right) \times 100 \quad (4)$$

where; bundle and control are calculated using the data from Eq. 3. Positive values indicate that normalized wave energy under the bundle scenario is reduced relative to control conditions. A negative E indicates that wave energy is increased relative to control conditions. This

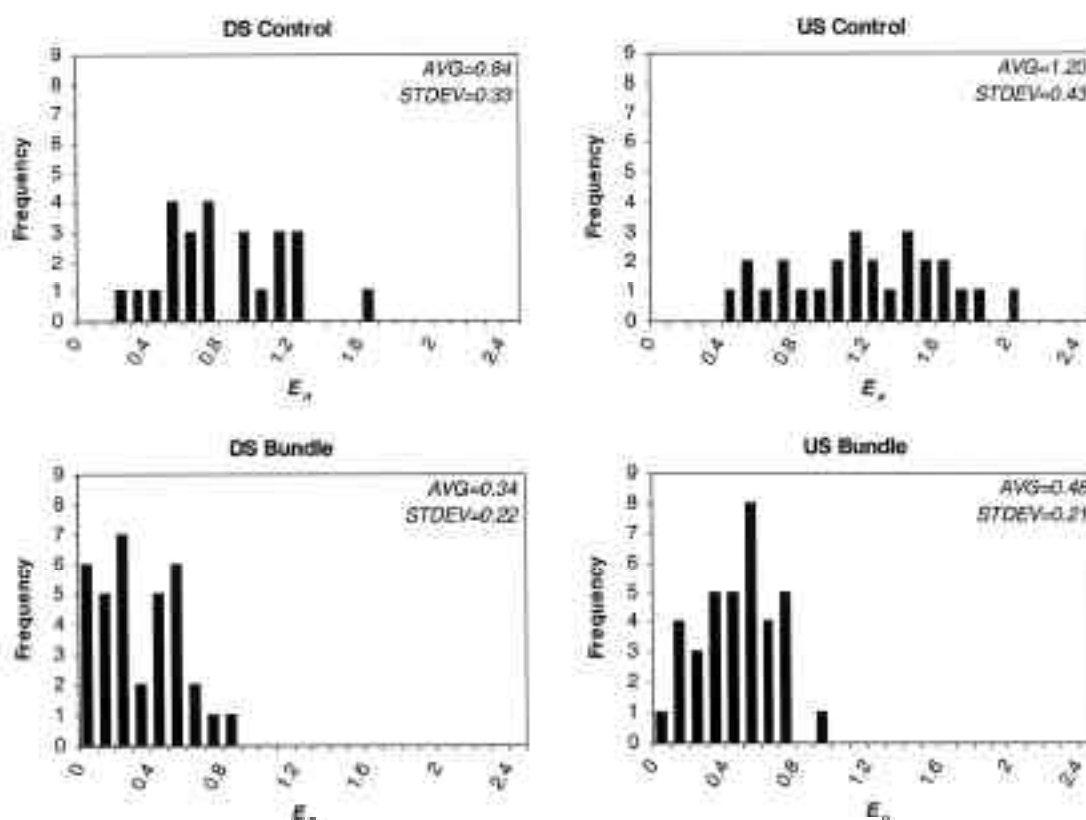


Figure 4. Energy ratio distributions for the experimental conditions. Note especially the reduced energy ratios when the bundles are in place ($E_n < 1.0$)

experiment found an energy reduction of 59% for the downstream pair, 60% for the upstream pair, and 60% for average that combined the upstream and downstream data.

The second hypothesis is that energy reduction is depth dependent. Total water depth fluctuated by approximately 0.5 meters during sampling. During high tides the bundles were completely submerged and during low tide, the crest of an average boat wake would not reach the top. Because of their porous composition, there was always some flow through the structures. A depth dependency would indicate that bundle effectiveness fluctuates with changes in water levels caused by tides or flood flows.

In order to test for depth dependency, total water depth was normalized relative to the average elevation of the top of the bundles (0.65 meters relative to a reference elevation) and half the index wave height ($1/2H_i$) using:

$$h_n = \frac{h_{out} - 1/2H_i}{0.65} \quad (5)$$

where h_n is normalized depth, and h_{out} is outer instrument depth. Normalized depths equaling 1.0 indicate that the

crest of the index wave height is flush with the top of the bundles. Normalized depths less than 1.0 indicate that the crest of an index wave is below the bundle top (i.e. low water). Values greater than 1.0 indicate the wave crest will overtop the bundles.

Regression analysis was used to test for a relationship between water depth and bundle effectiveness. The test used the data obtained from the spatial averaging of inner and outer pressure transducer pairs. Analysis used the downstream and upstream averages by regressing normalized depth versus energy. Normalized depth versus energy relationships are presented in Figure 5. A least-squares line is plotted when regression analysis indicates statistical significance ($p < 0.001$).

For the control scenario, regression analysis indicated that energy is not dependent on depth. There is, however, some suggestion that with very low water ($h_n = 0.8$), E_n increases as h_n decreases. This is likely a result of normal wave transformation in shallow water as the boat wakes begin to break. With the bundles in place, regression analysis indicated that energy is dependent on depth during low water conditions ($p < 0.001$).

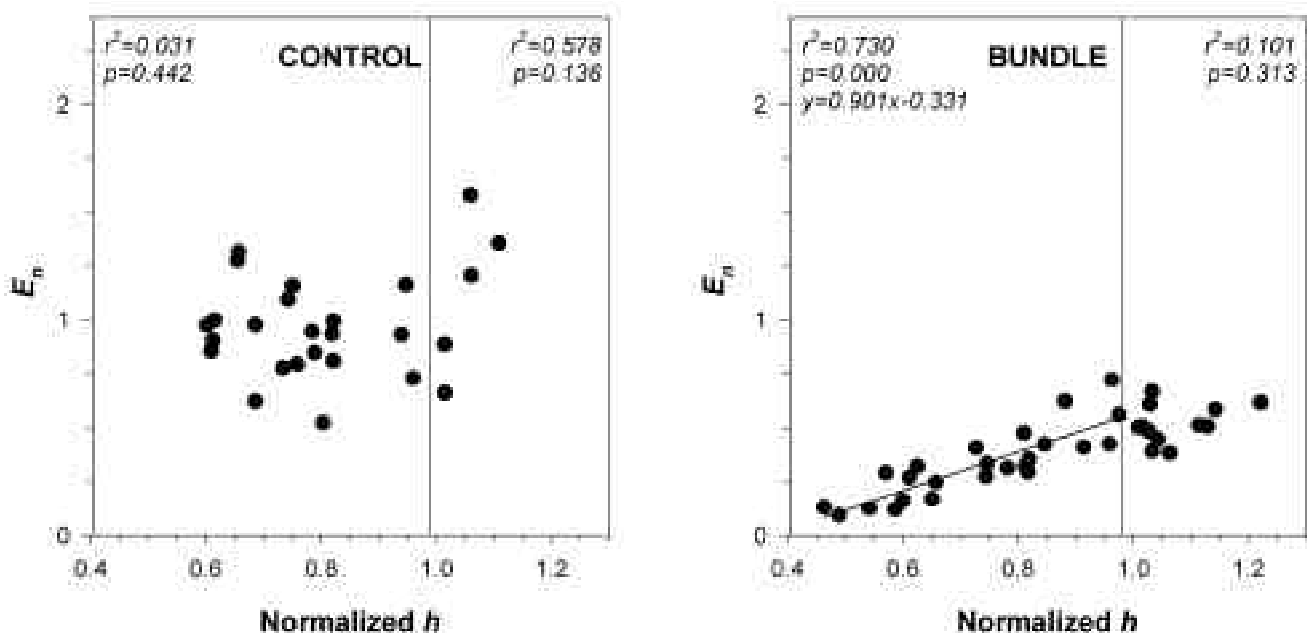


Figure 5. Normalized depth versus energy ratios (E_n) for the control (a) and bundle (b) scenarios for the DS and US average. High and low water conditions are delimited by the $h_n=1$ line. Only statistically significant, least-squares lines are plotted.

SUMMARY AND CONCLUSIONS

This study was designed to assess the impacts of brush bundles on boat wake energy, and to determine if the degree of effectiveness depends on water depth. Field work was conducted on Georgiana Slough, a distributary of the Sacramento River, in August 2000. Characteristics of boat wakes were measured using an array of pressure transducers with and without the brush bundles installed. Index wave heights at the inner instruments were normalized using measurements from the outer instruments to represent input wave conditions. These ratios were then used to test the hypotheses concerning brush bundle effectiveness.

This study found that brush bundles are an effective method to reduce potential boat-wake induced levee erosion. Comparing the sample means of the control and bundle scenarios revealed a 60% reduction of wake energy by the brush bundles. It was also found that wake energy reduction was strongly depth dependent. These results are comparable to previous studies that quantified energy reduction through or across other natural or anthropogenic barriers (Table 3). These results provide the first quantitative demonstration of the efficiency of brush bundles in reducing boat wake energy. It may be presumed that they would have a similar effect on wind-generated waves, also an erosion hazard in some reaches of the Delta.

Using brush bundles to reduce boat wake energy fits well within a larger context of environmental management and

Table 3. Summary of results from related studies of energy reduction by natural and anthropogenic barriers, and reduction by brush bundles (this study).

	Average Percent Energy Change
Porous Breakwater	
WALTHER and LEE (1975)	90
Coral Reefs	
ROBERTS <i>et al.</i> (1975)	75
ROBERTS and SUHAYDA (1983)	73
ROBERTS <i>et al.</i> (1992)	85
LUGO-FERNÁNDEZ <i>et al.</i> (1998)	83
LUGO-FERNÁNDEZ <i>et al.</i> (1998a)	91
Intertidal Fences	
BOUMANS <i>et al.</i> (1997)	50
Mangrove Forest - dense	
MASSEL <i>et al.</i> (1999)	99
Brush Bundles	
This Study	60

policy. In the Sacramento-San Joaquin Delta, levees are a vital boundary between natural and engineered waterways and the low-lying islands. Managers are challenged to implement policies that improve levee integrity while concurrently considering economic, recreational, developmental, agricultural and environmental protection factors. Because they suit the constraints imposed by many

of these factors, brush bundles appear to be a compromise solution to levee erosion. Their design, construction and installation is inexpensive and less time consuming than various forms of armoring. Additionally, they are not physically intrusive or aesthetically disturbing. For these reasons, brush bundles are a viable management alternative where such environmental issues are of concern.

ACKNOWLEDGEMENTS

The authors would like to thank Andreas Baas, David Hansen and Richard Seymour for their valuable field assistance. Rory Quinn provided useful comments on the manuscript. Any omissions or errors are the responsibility of the authors.

LITERATURE CITED

- ALLEN, H.H. and LEECH, J.R., 1997. Bioengineering for streambank erosion control; Report I, Guidelines. *U.S. Army Engineers Waterways Experiment Station EL-97-8*, pp. 90.
- BARSDALE, R.W., 1960. Bank protection on Central Valley streams. *Journal of Waterways and Harbors Division (ASCE)*, 86(WW 4), 1-16.
- BHOWMIK, N.G. DEMISSIE, M. and GUO, C.-Y., 1982. Waves generated by river traffic and wind on the Illinois and Mississippi Rivers. University of Illinois Water Resources Center, *WRC Research Report No. 167*. 90p.
- BOUMANS, R.M.J. DAY, J.W. KEMP, G.P., and KILGEN, K., 1997. The effect of intertidal sediment fences on wetland surface elevation, wave energy and vegetation establishment in two Louisiana coastal marshes. *Ecological Engineering*, 9, 37-50.
- BREBNER, A., HELWIG, D. and CARRUTHERS, J., 1966. Waves produced by ocean-going vessels: A laboratory and field study. *Proceedings of the 10th Conference on Coastal Engineering (ASCE)*, pp. 445-459.
- CALIFORNIA DEPARTMENT OF WATER RESOURCES (CADWR), 1995. *Sacramento-San Joaquin Delta Atlas*. Sacramento, California: Department of Water Resources, 121p.
- CHEN, Y.-C., 1998. River engineering work on Nanjing reach of lower Yangtze River. *Journal of Waterway, Port, Coastal and Ocean Engineering (ASCE)*, 124(2): 43-47.
- COLLINS, J.I. and NODA, E.K., 1971. Causes of levee damage in the Sacramento-San Joaquin Delta. Unpublished Report, Department of Navigation and Ocean Development.
- DEAN, R.G. and DALRYMPLE, R.A., 1984. *Water Wave Mechanics for Engineers and Scientists*. Englewood Cliffs, NJ: Prentice-Hall, 353p.
- DUBI, A. and TORUM, A., 1996. Wave energy dissipation in kelp vegetation. *Proceedings of the 25th Conference on Coastal Engineering (ASCE)*, pp. 2626-2639.
- FODA, M. A. 1995. *Assessment of the Erosion Problem in the Sacramento-San Joaquin Delta: A Critical Review of Previous Studies*. Report to California Department of Boating and Waterways. 32p.
- FODA, M.A.; LU, W.-H, HUANG, S.-M, STURM, A. and GALLA, S. E., 1999. *Boat Waves Contribution to the Levee Erosion Problem in the Sacramento-San Joaquin Delta*. Report to California Department of Boating and Waterways. 88p.
- FONSECA, M.S. and CAHALAN, J.A., 1992. A preliminary evaluation of wave attenuation by four species of seagrass. *Estuarine, Coastal, and Shelf Science*, 35: 565-576.
- HEY, D., 1968. Ship waves in navigable waterways. *Proceedings of the 11th Conference on Coastal Engineering (ASCE)*, pp. 1472-1487.
- INTER-FLUVE, INC., 1999. *Tyler Island levee protection and habitat restoration plan: Preliminary geomorphic review, preliminary hydraulic review*. Report to Habitat and Restoration Team, Inc. 58p.
- JOHNSON, J.W., 1958. Ship waves in navigational channels. *Proceedings of the 6th Conference on Coastal Engineering (ASCE)*, pp. 660-690.
- JOHNSON, J.W., 1968. Ship waves in shoaling waters. *Proceedings of the 11th Conference Coastal Engineering (ASCE)*, pp. 1488-1497.
- KAMPHUIS, J.W. 2000. *Introduction to Coastal Engineering and Management, Advanced Series on Ocean Engineering, vol. 16*. Singapore: World Scientific, 437p.
- KOBAYASHI, N. RAICHLE, A.W. and ASANO, T., 1992. Wave attenuation by vegetation. *Journal of Waterway, Port, Coastal and Ocean Engineering (ASCE)*, 119(1), 30-48.
- LEE, J.M. NAHAJSKI, A. and MILLER, S., 1997. Riverbank stabilization program. *Journal of Water Resources Planning and Management (ASCE)*, 123(5): 292-294.
- LIMERINOS, J.T. and SMITH, W., 1975. Evaluation of the causes of levee erosion in the Sacramento-San Joaquin Delta, California. *U. S. Geological Survey, Water Resources Investigations No. 28-74*, 53p.
- LUGO-FERNÁNDEZ, A. ROBERTS, H.H. and SUHAYDA, J.N., 1998. Wave transformations across a Caribbean fringing-barrier coral reef. *Continental Shelf Research*, 18: 1099-1124.
- LUGO-FERNÁNDEZ, A. ROBERTS, H.H., WISEMAN, JR, W.J., 1998a. Tide effects on wave attenuation and wave set-up on a Caribbean coral reef. *Estuarine, Coastal and Shelf Science*, 47: 385-393.

- MASSEL, S.R. FURUKAWA, K. and BRINKMAN, R.M., 1999. Surface wave propagation in mangrove forests. *Fluid Dynamics Research*, 24: 219-249.
- MASSEL, S.R. and BUTOWSKI, P., 1980. Wind waves transmission through porous breakwater. *Proceedings of the 17th Conference on Coastal Engineering (ASCE)*, pp. 333-346.
- MOUNT, J.F., 1995. *California Rivers and Streams*. Berkeley, California: University of California Press, 359p.
- NANSON, G.C. VON KRUSEN TIERNIA, A. BRYANT, E.A., and RENILSON, M.R., 1994. Experimental measurements of river-bank erosion caused by boat-generated waves on the Gordon River, Tasmania. *Regulated Rivers: Research and Management*, 9: 1-14.
- NIELSEN, P., 1989. Analysis of natural waves by local approximation. *Journal of Waterway, Port, Coastal and Ocean Engineering (ASCE)*, 115(3): 384-396.
- OSBORNE, P. and BOAK, E., 1999. Sediment suspension and morphological response under vessel-generated wave groups: Torpedo Bay, Auckland, New Zealand. *Journal of Coastal Research*, 15(2): 388-398.
- PARNELL, K.E., 1996. *Monitoring Effects of Ferry Wash in Tory Channel and Queen Charlotte Sound*. Report to Marlborough District Council and the Regional Conservator, Nelson/Marlborough Conservancy, Department of Conservation. 23p.
- ROBERTS, H.H.; MURRAY, S., and SUHAYDA, J.N., 1975. Physical processes in a fringing reef system. *Journal of Marine Research*, 33: 233-260.
- ROBERTS, H.H. and SUHAYDA, J.N., 1983. Wave-current interactions on a shallow reef (Nicaragua, Central America). *Coral Reefs*, 1: 209-214.
- ROBERTS, H.H. WILSON, P.A. and LUGO-FERNÁNDEZ, A., 1992. Biologic and geologic responses to physical processes: examples from modern reef systems of the Caribbean-Atlantic region. *Continental Shelf Research*, 12(7/8): 809-834.
- SORENSEN, R.M., 1967. Investigation of ship-generated waves. *Journal of Waterway, Port, Coastal and Ocean Engineering (ASCE)*, 93(WW1): 85-99.
- SORENSEN, R.M., 1973. Water waves produced by ships. *Journal of Waterways, Harbors and Coastal Engineering Division (ASCE)*, 99(WW2): 245-256.
- WALTHER, J.A. and LEE, J.-J., 1975. Measurement of wave energy transmission through the San Pedro breakwater, Los Angeles, California: University of Southern California Sea Grant Program. 91p.