



## Using cultivated organic soil depth to form soil conservation management zones

Authors: Deragon, Raphaël, Julien, Anne-Sophie, Dessureault-Rompré, Jacynthe, and Caron, Jean

Source: Canadian Journal of Soil Science, 102(3) : 633-650

Published By: Canadian Science Publishing

URL: <https://doi.org/10.1139/cjss-2021-0148>

---

BioOne Complete ([complete.BioOne.org](https://complete.BioOne.org)) is a full-text database of 200 subscribed and open-access titles in the biological, ecological, and environmental sciences published by nonprofit societies, associations, museums, institutions, and presses.

Your use of this PDF, the BioOne Complete website, and all posted and associated content indicates your acceptance of BioOne's Terms of Use, available at [www.bioone.org/terms-of-use](https://www.bioone.org/terms-of-use).

Usage of BioOne Complete content is strictly limited to personal, educational, and non-commercial use. Commercial inquiries or rights and permissions requests should be directed to the individual publisher as copyright holder.

---

BioOne sees sustainable scholarly publishing as an inherently collaborative enterprise connecting authors, nonprofit publishers, academic institutions, research libraries, and research funders in the common goal of maximizing access to critical research.

# Using cultivated organic soil depth to form soil conservation management zones

Raphaël Deragon <sup>a</sup>, Anne-Sophie Julien<sup>b</sup>, Jacynthe Dessureault-Rompré<sup>a</sup>, and Jean Caron<sup>a</sup>

<sup>a</sup>Département des sols et de génie agroalimentaire, Faculté des sciences de l'Agriculture et de l'alimentation, Université Laval, 2325 Rue de l'Université, Québec City, QC G1V 0A6, Canada; <sup>b</sup>Département de mathématiques et de statistique, Faculté des sciences et de génie, Université Laval, Québec City, QC G1V 0A6, Canada

Corresponding author: Raphaël Deragon (email: [raphael.deragon.1@ulaval.ca](mailto:raphael.deragon.1@ulaval.ca))

## Abstract

Cultivated Organic soils in Montreal's southwest plain are the most productive soils in the province of Quebec. After their initial drainage to enable farming, Organic soils are susceptible to many forms of degradation and soil loss. In this study, we characterized the physical, chemical, and pedological properties of 114 sites from five peatlands to form soil conservation management zones. We attempted to use the maximum peat thickness (MPT) as a soil degradation proxy. The MPT can be defined as the thickness of the layer of peat until coprogenous or mineral materials are reached. The latter are undesired growing media and are not considered in MPT calculation. A series of multivariate analysis of variance indicated that MPT was moderately related to soil degradation (optimal model's Pillai's trace = 0.495). Three soil degradation groups were defined, separated by two MPT thresholds: 60 and 100 cm. When looking at 17 different depth-property combinations, shallower sites (MPT < 60 cm) showed signs of soil degradation significantly higher than sites with an MPT above 60 cm. The second threshold was proposed for practical purposes. Then, these thresholds were used to separate the study area into spatially distinct management zones. Important spatial contrasts were found. This supports the theory that precision agriculture techniques are needed to target fields to optimize soil conservation interventions. The relationship between the MPT and soil degradation should be further explored to account for other degradation factors, and to better identify degraded soils and soils at risk.

**Key words:** Organic soils, maximum peat thickness, soil conservation, soil degradation, management zones

## Résumé

Les sols organiques de la plaine au sud-ouest de Montréal figurent parmi les plus fertiles du Québec. Cependant, une fois drainées pour en permettre la culture, ces terres peuvent se dégrader et le sol peut s'éroder de nombreuses manières. Les auteurs ont déterminé les propriétés physiques, chimiques et pédologiques de 114 sites disséminés dans cinq tourbières afin de créer des zones de conservation du sol. Ils ont utilisé l'épaisseur de la tourbe (ET) comme valeur de remplacement pour la détérioration du sol. Ce paramètre correspond à l'épaisseur de la couche de tourbe jusqu'aux matériaux coprogènes ou minéraux, c'est-à-dire le milieu de croissance indésirable dont on ne se sert pas pour calculer l'épaisseur de cette couche. Plusieurs analyses de la variance à variables multiples indiquent que l'ET présente des liens modérés avec la détérioration du sol (trace de Pillai dans le modèle optimal = 0,495). Les auteurs ont établi trois groupes de dégradation du sol, séparés par deux seuils : 60 et 100 cm d'ET. Quand on examine 17 combinaisons profondeurpropriété, on constate que les sites où la couche de tourbe est mince (ET < 60 cm) se dégradent sensiblement plus vite que ceux où l'ET dépasse 60 cm. Le deuxième seuil a été proposé pour des raisons pratiques. Ensuite, les auteurs ont recouru aux deux seuils pour diviser la région à l'étude en zones de gestion géographiquement distinctes, ce qui a révélé des contrastes importants dans l'espace. Ces résultats appuient la théorie voulant que les techniques de l'agriculture de précision devraient s'appliquer à des terrains précis de façon à optimiser les interventions visant à préserver le sol au maximum. On devrait approfondir les liens entre l'ET et la dégradation du sol afin de prendre en compte d'autres facteurs et de mieux identifier les sols dégradés ou ceux qui présentent des risques sur ce plan. [Traduit par la Rédaction]

**Mots-clés :** Sols organiques, épaisseur maximale de tourbe, conservation du sol, dégradation du sol, zones de gestion

## Introduction

In the province of Quebec, cultivated wetland Organic soils account for only 4% of the southern territory but support

a strong, prosperous horticultural industry (Groupe AGÉCO 2007; Parent and Gagné 2010). Quebec is the second most important producer of fresh vegetables in Canada with 40% of

the total Canadian acreage, of which 40% are cultivated Organic soils, equivalent to 9000 ha (MAPAQ 2018). The Montérégie region, south of Montreal, is home to 56% of the vegetable production acreage of the province. There, organic materials were deposited over many hundreds of years in anaerobic conditions, limiting peat degradation. Once drained for agriculture, Organic soils are in constant transformation, caused by subsidence, oxidation, and erosion (Kroetsch et al. 2011; Vepraskas and Craft 2015), depending on their initial carbon content and land use (Mann 1986). Low density and high volumetric porosity before initial drainage (78%–93%) are favorable conditions that allow important subsidence in the first years post-drainage (Driessen et al. 2000; Ilnicki and Zeitz 2003; van Asselen et al. 2010; Liu et al. 2016). Over time, surface layers will be mineralized and humified (i.e., decomposed) by microorganisms oxidizing peaty materials (Ilnicki and Zeitz 2003; Kroetsch et al. 2011). Combined soil losses, mainly wind erosion, equate to 1–5 cm·yr<sup>-1</sup> (Ilnicki 2003; Esselami et al. 2014). Another threat to productivity comes in the form of an impervious, uncultivable layer made of coprogenous material. Limnic materials can be found between the top peaty layer and the mineral horizon (SCWG 1998). With soil loss, a coprogenous layer, when present, risks being exposed at the surface. Evolution of Organic soils is unidirectional and ultimately leads to degradation if no soil conservation measures are implemented.

Soil degradation has been repeatedly reported as a cause of modifications in physical and chemical properties. Bulk density can be higher with the decomposition of peat soils (Brandyk et al. 2003; Ilnicki and Zeitz 2003; Anshari et al. 2010; Hallema et al. 2015a; Wang et al. 2021). Dessureault-Rompré et al. (2018) reported that the development of a compacted layer is more important with soil degradation. The water retention capacity diminishes (Zeitz and Velty 2002). Moreover, modification of particle size, porosity, and soil structure affect the water retention curve (WRC; Shein et al. 2018). These parameters are modified with peat decomposition (Brandyk et al. 2003; Ilnicki and Zeitz 2003; Okruszko and Ilnicki 2003; Vepraskas and Craft 2015). Saturated hydraulic conductivity (Ksat) is a function of botanical origin as well as peat decomposition level (Ilnicki and Zeitz 2003; Gnatowski et al. 2010; Wang et al. 2021). Other properties are known to be modified by peat decomposition. Increase in pH and total nitrogen content could act as indicators of soil degradation if nitrogen fertilizer inputs are considered (Anshari et al. 2010). Trace elements adsorbed to surface soil could also serve as a degradation indicator, such as inorganic elements — Si, Fe, and Al (Ilnicki and Zeitz 2003). Organic matter and organic carbon contents are reduced with soil degradation (Hallema et al. 2015a; Krüger et al. 2015). To help manage peat soil degradation in wetlands, Sienkiewicz et al. (2019) suggested the use of the ratio between dissolved organic carbon and soil organic carbon as a measure of intensity of peat mineralization, also supporting the use of carbon loss as an indicator. The same authors also mentioned that the ratio could be more sensitive than the C/N ratio and the total nitrogen content as indicators of decomposition. The literature offers a handful of proposed critical thresholds, mainly for physical organic soil properties, that can be

useful to classify soils based on their degradation. A meta-analysis showed that the botanical origin and decomposition level (von Post scale) of peat significantly affected hydraulic properties (Liu and Lennartz 2019). A critical value for bulk density was proposed by the authors: 0.2 g·cm<sup>-3</sup>. Lafond et al. (2015) proposed a limiting value of 10<sup>-4</sup> cm·s<sup>-1</sup> for the Ksat. Higher values are desired to ensure good agricultural drainage and to avoid root asphyxia. It is also possible to look at artificial growing media, where Caron and Michel (2021) proposed that an air content at -1 kPa inferior to 0.10–0.15 cm<sup>3</sup>·cm<sup>-3</sup> is problematic for crops. Soil compaction can affect water and air flow in the soil matrix. Soil penetration resistance can assess the presence of a compacted layer. Growing roots can exert a maximal force of 0.9–1.3 MPa to colonize the soil (Bengough and Mullins 1990). No clear relationship has been proposed to link the force of growing roots to measured soil penetration resistance in organic soils. Thus, it is safe to assume that 1.3 MPa could serve as a potential soil compaction threshold. However, 0.5 MPa could also serve as an additional potential threshold because this value is associated with perched water table formation, and it is known to lead to low oxygen levels limiting root development.

Since many peat degradation indicators are available, but there are few critical thresholds, there is a need to find a simpler proxy that could simplify soil conservation management operations of Organic soils. In the province of Quebec, three Great Groups can be found with increasing degrees of decomposition: Fibrisols, Mesisols, and Humisols (SCWG 1998). However, a taxonomic distinction in itself is not enough to manage these highly fertile soils. Furthermore, simply relying on rubbed fibers or sodium pyrophosphate index (SCWG 1998; Parent and Caron 2007) to evaluate peat decomposition level is not efficient in managing cultivated peatlands at regional scale. Recently, two large-scale studies were carried out in Montérégie to create groups of soils linked to peat decomposition (Hallema et al. 2015a, 2015b). While the group separation is clearly related to hydraulic properties and to the number of years since land conversion for agriculture, the results imply the use of expensive measurements of soil properties to diagnose and recommend soil conservation measures. Expert knowledge and farmer experience suggest that shallow soils exhibit important degradation signs and limit crop yields. This observation is supported by the fact that freeze-thaw and shrink-swell cycles and microorganism activity are more intense near the surface (Zeitz and Velty 2002; Ilnicki 2003; Okruszko and Ilnicki 2003). Therefore, it was hypothesized that cultivated Organic soils could be divided into at least two groups with differing soil degradation levels related to their cultivation depth, affecting both physical and chemical properties. We are now introducing the maximum peat thickness (MPT) as the thickness of the surface peaty layer down to coprogenous or mineral materials. This definition excludes the coprogenous layer from the cultivable organic soil thickness because of its unsuitable properties for agriculture. The maximum peat thickness appears preferable to organic layer depth as a decision-making tool since it can be converted to a residual number of cultivation years using annual losses. Therefore, it can be translated to arable land value. The specific objectives of this paper were to perform

an initial characterization of soils from the study area to allow a temporal monitoring of soil properties and to define management zones based on soil degradation discriminating properties affected by the MPT.

## Materials and methods

### Site selection

The visited sites are distributed among five drained and cultivated peatlands located in the southwest plain of Montreal, Quebec. These peatlands are in three separate watersheds (Lamontagne et al. 2014). The mean annual rainfall is 1000 mm and the mean annual temperature is 6.0 °C.

The sampling design was centred around contrasted sites belonging to 14 research-partner farms. Thus, expert knowledge was used to cover the study area and to capture the effects of shallow and deep deposits on soil properties. Precise measurements of depth were unknown before sampling. A total of 120 sites were sampled through 2018 and 2019, but 114 were kept for statistical analyses after the removal of sites with missing samples. Due to time and budget constraints, no replicates were collected regarding soil samples for chemical and physical analyses.

### Pedological characteristics

At each site, a soil profile was described. Spatial coordinates and elevation were recorded with a differential GPS receiver (GENEQ GNSS F90) and a GPS data collector (SXPAD 1000P). Figure 1 shows the location of each site and the study area.

Depth to the mineral layer was measured at every location, even when it exceeded the 1.6 m control section, which is the standard soil profile depth for the Organic soil order (SCWG 1998). Soil pits were dug with a shovel until 70 cm, and then a Macaulay sampler (Eijkelkamp peat sampler) was used to extract 50 cm long soil cores until the underlying mineral layer was reached. At every location, various morphological traits were described, such as thickness of layers, fiber and rubbed fiber content, coarse fragments, structure, and botanical origin of fibers. Afterwards, the MPT was obtained at each site by subtracting the coprogenous layer thickness from the depth to the mineral layer. Soil profile description was based on the Manual for describing soils in the field (Expert Committee on Soil Survey 1982) and the Canadian System of Soil Classification (SCWG 1998).

### Physical properties

#### Saturated hydraulic conductivity and bulk density

An aluminum cylinder with an internal diameter of 82 mm and a height of 55 mm was carefully pushed into the soil matrix to limit soil disturbance. Then, it was extracted with a shovel. A knife was used to trim the excess soil on both sides of the cylinder before a cloth was put in place with a rubber band to contain the soil sample. The cylinder was then placed in a plastic bag and was sealed to keep the sample moisture. Then, the hole was deepened to the next sampling depth. At each site, the soil was sampled at 0–5, 30–35, and 50–55 cm.

Once transported to the laboratory, samples were kept at 4 °C before performing lab tests.

Saturated hydraulic conductivity was evaluated with the constant head method (Reynolds 2007). The samples were saturated over 24 hours in a tank. A constant water head was maintained with a Mariotte reservoir. The outflow was measured with calibrated pressure transducers in the Mariotte reservoirs and Ksat was derived using Darcy's law. Data were gathered using Loggernet (version 3.4.1, Campbell Scientific, 2007) software, and the calculation of Ksat was done in Microsoft Excel.

Once Ksat had been measured, the soil was dried and the bulk density was calculated using the equation from Hao et al. (2007). The temperature was adapted to Organic soils, and the soil samples were dried at 65 °C instead of the standard 105 °C (Sheppard and Addison 2007; Vepraskas and Craft 2015).

#### Water retention curve

The water retention curve can be obtained using one of two general ways: in a laboratory with undisturbed soil samples, or in situ with tensiometers and a time-domain reflectometry probe (Brandyk et al. 2003). In both cases, the water content is studied as a function of the soil matric potential. Since the number of sites and samples were important, the laboratory approach was selected. A second series of three cylinders was extracted side by side at the same depth as that used for Ksat measurements. The soil samples were kept at 4 °C until laboratory manipulations were performed.

For the first WRC points at low tension, a tension table with glass beads was used (CPVQ 1997a). At high matric potential, soil samples were put on a scale with a tensiometer, relying on evaporation losses to complete the curve (Šimůnek et al. 1998). Loggernet software was used to gather and save data. Some samples from 2018 were put in a pressure extractor to obtain the last WRC points instead of using the evaporation method (Reynolds and Topp 2007).

#### Soil penetration resistance

A numerical penetrometer with a static cone form Eijkelkamp (Eijkelkamp Soil and Water, Giesbeek, Netherlands) was used to collect the soil penetration resistance (PR) in the first 80 cm of soil. The device produces a curve of PR in MPa as a function of depth. Each curve is georeferenced with an integrated GPS receiver. The data can then be exported with the PenetroViewer software (version 6.08, Eijkelkamp, 2011).

Five curves were obtained at each site around the soil profile. Then, they were averaged for each centimeter and the mean PR curve was filtered with Guedessou's (2020) R script to correct for friction noise and experimenter bias. The final product was an average curve with values at 5 cm increments.

#### Particle size distribution

Particle size distribution is indicative of surface soil erodibility. It was calculated on the first 20 cm of soil (see the chem-

**Fig. 1.** Regional view of the final selection of 114 sites visited in Montérégie-Ouest, Quebec, in the summers of 2018 and 2019. [Colour online]



ical analyses section). A sample of at least 100 g of air-dried soil was placed in the upper sieve of a series of nine sieves stacked on a sieve shaker (CPVQ 1997b). Each sieve had a different mesh size ranging from 16 to 0.1 mm. The erodible fraction was assessed based on the percentage of soil mass that went through the 0.84 mm sieve after one minute of shaking (López et al. 2007).

### Chemical properties

Concerning chemical analyses, three bags were filled with soil extracted with a Dutch soil sampler probe at different depths: 0–20, 20–40, and 40–60 cm. Soil from four to five locations around the soil profile was sampled and mixed in each bag to obtain a sufficient volume for analysis. The bags were hermetically closed and stocked at 4 °C. Before performing the analyses, the soil samples were dried at 65 °C, ground, and sieved to 2 mm (CPVQ 1988).

One should note that sampling depths were fixed before the beginning of the study, for chemical and physical properties, no matter what the MPT would be. First, this methodology allowed comparison of the properties between sites at the same depths. Second, roots of vegetable crops are mostly found in those depth ranges. Since organic soil degradation and soil loss occur in the topmost layers, it would not have been justified to sample at greater depths (i.e., 70 or 80 cm).

### Loss on ignition

The organic matter content was estimated using the loss-on-ignition method. The analysis was performed on 10 g of soil (MDDELCCQ 2017). The soil sample was combusted at 550 °C over 16 hours.

### Sodium pyrophosphate index

The sodium pyrophosphate index was obtained with the colorimetric determination procedure (Parent and Caron 2007). The absorbance of a sample of organic soil that reacted with sodium pyrophosphate was read with a UV-VIS Cary 100 Bio spectrophotometer with CarywinUV software (Agilent Technologies Inc.). The degree of peat decomposition can be estimated with this method. With this index, higher values are associated with more degraded peat materials. It is a repeatable laboratory method that can add to the more empirical unrubbed and rubbed fiber field method.

### Total nitrogen content and total carbon content

The total nitrogen content and total carbon content were estimated with the LECO macro combustion method with an 828 Series Carbon Nitrogen Protein Determinator (LECO, Michigan, USA) following the manufacturer's protocol.

## Soil pH in water and electrical conductivity

The method from [CEAEQ \(2014\)](#) was followed to measure soil pH in water and electrical conductivity. A 1:5 soil–water extraction ratio was used instead of the standard 1:1 and 1:2 extraction ratios. Soils with high organic matter content tend to form a paste instead of a liquid solution, which complicates measurements ([Hendershot et al. 2007](#)). A symphony SB70P pH meter was used (VWR, Pennsylvania, USA) to measure the pH, and a symphony SB70C conductivity meter (VWR, Pennsylvania, USA) was used to measure electrical conductivity.

## Statistical analyses

Spatial manipulations and statistical analyses were performed using QGIS version 3.10.13 ([QGIS Development Team 2020](#)) and R version 3.6.3 ([R Core Team 2020](#)).

## Data preparation and exploration

A total of 53 out of 65 variables (depth–property combinations) were kept in the final matrix. Some pedological properties were removed since they were less relevant and appeared less empirically correlated with the soil degradation phenomenon. [Appendix 1](#) provides a table of descriptive statistics of all final variables. Many variables showed values for skewness and kurtosis higher than 2 ([Tabachnick and Fidell 2013](#)). Hence, the R library `bestNormalize` package ([Peterson 2020](#)) was used to automatically find the best transformation for each variable.

The presence of univariate relationships between the variables and the MPT was explored through scatterplots. The objective was to find strong relationships and link them to soil degradation before the multivariate analyses. If multivariate analyses fail, promising univariate relationships could be further explored.

## Principal component analysis

A principal component analysis (PCA) was used to select a smaller set of representative and uncorrelated variables among the final selection of 53 variables to obtain a ratio of dependent variables (DVs) to observations (N) lower than 1:10 ([Tabachnick and Fidell 2013](#)). The PCA was performed on the correlation matrix of the transformed variables with the `psych` library ([Revelle 2020](#)). A varimax rotation was used. Concerning PCA assumptions, normality and factorability of the correlation matrix were respected.

Following PCA, 10 components were retained. Each of them had an eigenvalue  $>1$ , meaning that a component explained at least more variance than a raw variable. For each retained component, the most correlated variable was noted. These 10 chosen variables represented 73.3% of the total variance of the original data set. These variables (and depths) are total nitrogen and total carbon content (0–20 cm), pH (20–40 cm), water content at  $-3$  kPa (0–5 cm), available water content at  $-10$  kPa (0–5 cm), air content at  $-5$  kPa (30–35 and 50–55 cm), total porosity (50–55 cm), depth to the compacted layer, and maximal soil penetration resistance within the first

80 cm. The presence of multivariate outliers in the data set was evaluated. The Mahalanobis test ( $\chi^2$  for  $\alpha = 0.001$  for 10 df) revealed the absence of outliers for the 114 final observations and the 10 chosen variables.

## Multivariate analyses of variance (MANOVAs)

The proposed approach is inspired from [Hallema et al. \(2015a\)](#), who used incremental thresholds of reclamation year to form statistical groups of fields with significantly different properties. To determine the best MPT threshold to define the soil degradation groups, a series of MANOVAs was performed. The 10 variables from the PCA acted as DVs, while dichotomized MPT was the independent variable. The MPT was dichotomized using different thresholds, incremented by 10 cm from 40 to 130 cm to divide the data set into two soil degradation groups. MANOVAs were performed with the `manova` function ([R Core Team 2020](#)). Alpha = 0.05 was used.

The optimal threshold was selected based on two criteria. The first is Pillai's trace. This statistic can have a value between 0 and 1, where a high value reflects a larger effect of the independent variable on the DVs. Pillai's trace is accompanied by its 95% confidence interval (CI) limit derived from 5000 bootstraps. In short, bootstraps generate new data sets of the same sample size, on which MANOVAs will be performed, by randomly sampling with replacement of the original data set. Pillai's trace is then extracted for each MANOVA, and the CI can be derived by aggregating the results from the 5000 iterations and identifying the 2.5th and 97.5th percentiles.

The second criterion is the number of significant analyses of variance (ANOVAs) between the two groups for the 53 variables. The higher the number of properties significantly different between the soil degradation groups, the most relevant an MPT threshold will be considered. Moreover, ANOVAs were used to understand how soil properties differed between soil degradation groups. The Bonferroni adjustment gave control over type I error ([Tabachnick and Fidell 2013](#)). In more detail, the 0.05 alpha threshold was divided by the total number of ANOVAs to obtain a new alpha value of 0.000943. Therefore, to consider a property significantly different between soil degradation groups, this severe alpha value was preferred to be over 0.05. Assumptions of normality, independence of observations, and homogeneity of variance were verified for all ANOVAs. Some variables showed signs of heteroscedasticity. In those cases, we used a linear mixed model with heterogeneous variances.

After a first MPT threshold was chosen, a second series of MANOVAs was performed to test if a second MPT threshold could be used to form a third soil degradation group. Increments of 10 cm were tested from 80 to 170 cm. A third group could be needed to facilitate soil conservation. Indeed, the first group would be degraded soils, the second group would be considered at risk of degradation or as priority intervention zones to maintain productivity, whereas a third group would include deposits deep enough not to be considered a priority if conservation resources are limited (i.e., funds or material). Analyses of variance were also performed to find

significant differences in soil properties between groups. The Tukey's method was used to adjust multiple comparisons for significant variables.

## Results

### Relationships between the MPT and soil properties

Plots between the MPT and soil properties (Figs. 2 and 3) were generated as a first univariate approach, before computing MANOVAs, to explore potential relationships. Inverse exponential relationships and inverse relationships can be observed between some properties and the MPT, mostly related to carbon content. At a depth between 15 and 75 cm, a change seems to occur in the scatterplots. It is important to note that only a small number of properties seemed to be related to the MPT and that result might differ in the multivariate feature space.

Concerning Figs. 2 and 3, some observation points have an MPT smaller than the depth at which a property has been sampled. This is due to the fixed sampling depths. In other words, some samples are from coprogenous or mineral materials. Interestingly, a change in material is not the only factor affecting properties. It is noteworthy that properties measured closer to the surface (0–5 and 0–20 cm) also show signs of degradation linked to depth even if the sampled material is peaty.

### Maximum peat thickness threshold based on MANOVAs

A series of MANOVAs were performed with an incremental MPT threshold to form statistically significant groups linked to soil degradation. The results are given in Table 1. Comparison of results indicated that an MPT threshold of 60 cm would be the most appropriate, based on Pillai's trace and the number of statistically significant ANOVAs between groups. At this threshold, the data set was divided into two soil degradation groups of 12 and 102 observations. Combined DVs were significantly different between groups at this MPT threshold,  $F(10, 103) = 10.099$ ,  $p < 0.001$ . The results showed a moderate association between soil degradation groups and the combined DVs, Pillai's trace = 0.495 with a 95% CI between 0.36 and 0.68. Homogeneity of variance–covariance matrix assumption was rejected following Box's M test ( $p < 0.05$ ). Multivariate normality was respected for kurtosis but rejected for skewness. The use of the Pillai's trace metric is suggested when MANOVA assumptions are rejected (Olson 1974). Hence, the conclusions are still valid. Lack of multicollinearity between DVs is assumed.

### Testing a second significant MPT threshold

Once the 60 cm MPT threshold was obtained, a second series of MANOVAs was performed to test the significant addition of a second MPT threshold to form a third soil degradation group. Table 2 provides results from this second series of MANOVAs. Although all MPT thresholds were statistically significant, Pillai's trace ranged from 0.295 to 0.334, remaining lower than two-group MANOVAs (Table 1: 0.260 to 0.498).

Statistically speaking, there is no evidence to support the need of a second MPT threshold. However, given the fact that consequences of soil degradation are severe at 60 cm, a second MPT threshold could be used to identify some early signs of degradation. Indeed, considering that drain tiles are often placed at a depth of 90 cm, soil between 60 and 100 cm may face drainage limitations due to decomposition and compaction. It would be advised to use a similar depth as an MPT threshold. Hence, we proposed a second threshold at 100 cm. Therefore, as previously stated, this third soil degradation group represents soils that do not need immediate and important soil conservation investments. Their productivity might be less at risk in the short term, unlike soils near 60 cm, but they may need a close follow-up in the near future.

### Differences in soil degradation between groups


The MANOVAs revealed a significant difference between the soil properties of the observations above and under the 60 cm MPT threshold. To understand the magnitude of these differences, the results of the 17 statistically significant ANOVAs are given in Table 3.

All variables show signs of degradation in terms of soil quality in group 1. Group 1 comprises sites that are more humified (lower total carbon content, organic matter content, C/N ratio, and fiber and rubbed fiber content), more compact (higher bulk density, lower air content, and available water content), and more saline (higher electrical conductivity). As expected, the presence of mineral soil and coprogenous soil near the surface affected soil properties in the rooting zone.


To add to the previous table of results, Figs. 4–10 provide the density distribution of observations per soil degradation group for the 17 variables through violin diagrams. Violin plots are composed of a boxplot and a symmetrical density histogram. The box contains 50% of observations and is also defined as the interquartile range (IQR). Two whiskers, each usually representing 25% of the observations when no outliers are present, extend on each side of the box. Outliers are defined as the value on each side of the box  $\pm 1.5$  IQR. For instance, Fig. 4 shows that the organic matter content distribution within a group is similar except for the last depth (40–60 cm). Indeed, some sites had mineral materials (organic matter content <30%). A similar pattern is observed for the total carbon content (Fig. 10). Concerning bulk density and electrical conductivity, a wider range of values characterizes group 1 at greater depths (Figs. 5 and 6). For Figs. 7 and 9, similar distributions per group are observed at different depths for the C/N ratio and for the air content at  $-5$  kPa. On a general note, one can appreciate the narrower IQR for Group 2, meaning more variability is present in Group 1, except for fiber and rubbed fiber content and the C/N ratio (Figs. 8 and 9). Indeed, the more degraded soils from Group 1 show less variability for these properties.

Analyses of variance were also performed on the three-group solution using the 60 and 100 cm MPT thresholds. Eighteen variables were significantly different between groups (Table 4). Sites from Groups 1 and 2 belong to different classes

**Fig. 2.** Scatterplots of the maximum peat thickness and (a) the organic matter content between 40 and 60 cm, (b) the total carbon content between 40 and 60 cm, (c) the total nitrogen content between 40 and 60 cm, and (d) the total carbon content between 0 and 20 cm.

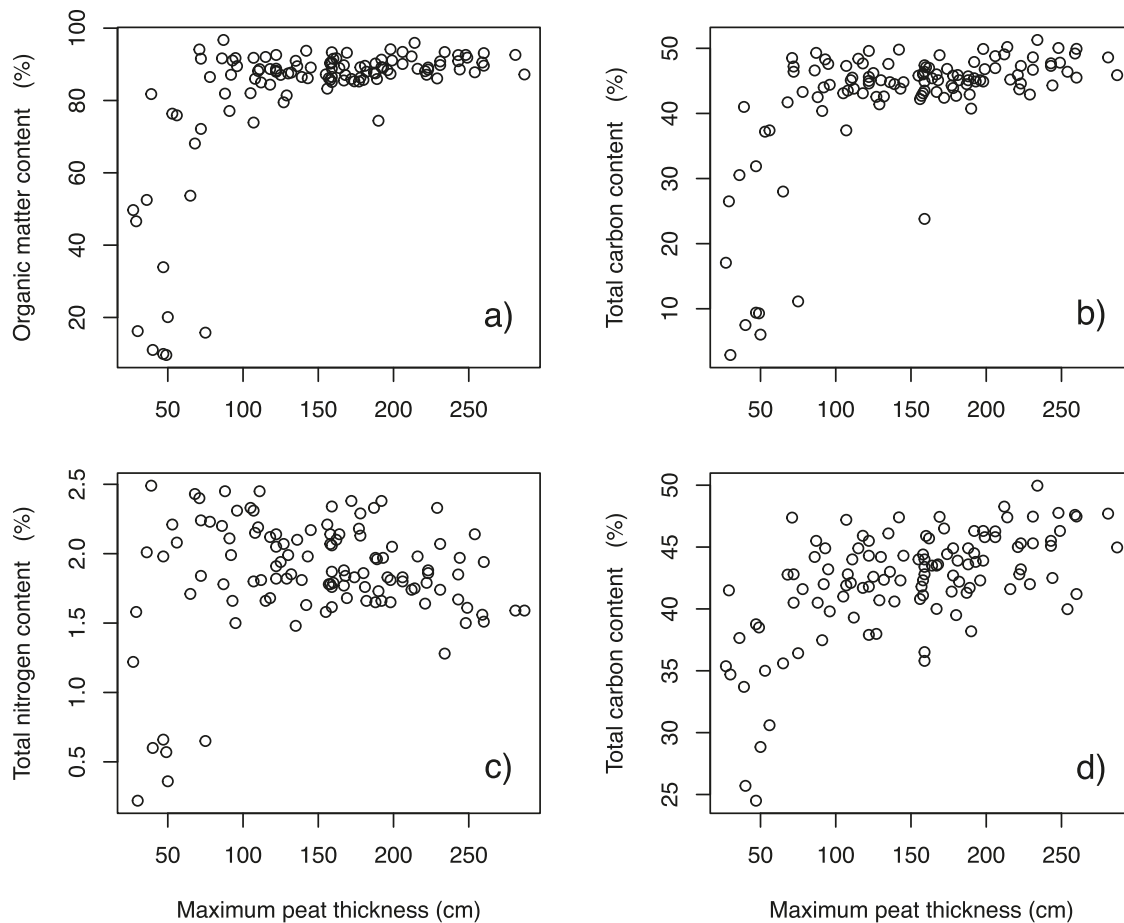

**Fig. 3.** Scatterplots of the maximum peat thickness and (a) the bulk density at 50–55 cm and (b) the electrical conductivity at 20–40 cm.

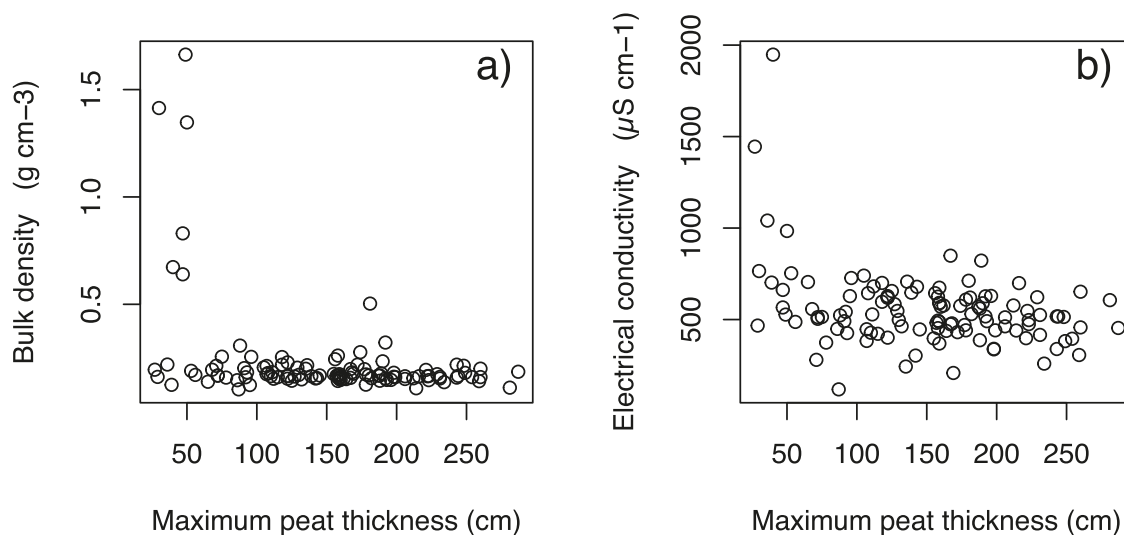

after Tukey's adjustment for multiple comparisons of the means. Group 3 is mostly of the same class as Group 2. Nonetheless, Group 3 is statistically different from Groups

1 and 2 for three soil properties: the organic matter content at 40–60 cm, the C/N ratio at 40–60 cm, and the thickness of the coprogenous layer in the first 160 cm, indicat-



**Table 1.** Series of multivariate analyses of variance (MANOVAs) with group-forming thresholds based on maximum peat thickness incremented between tests to define the first threshold.

Threshold (cm)	40	50	60	70	80	90	100	110	120	130
N1/N2	5/109	9/105	12/102	14/100	19/95	22/92	27/87	31/83	37/77	44/70
Pillai's trace	0.260	0.351	0.495	0.498	0.431	0.382	0.387	0.363	0.337	0.358
Pillai's lower bound (2.5%)	0.142	0.236	0.362	0.382	0.308	0.275	0.294	0.289	0.264	0.293
Pillai's upper bound (97.5%)	0.498	0.585	0.675	0.684	0.636	0.593	0.593	0.556	0.534	0.537
Number of significant ANOVAs/53	6	18	18	17	15	13	14	14	13	16

**Note:** The number of observations per group (N1/N2), Pillai's trace and its 95% confidence interval limits, and the number of significant analyses of variance (ANOVAs) between the groups out of 53 tested variables are also given. All MANOVAs are significant at  $p < 0.001$ .

**Table 2.** Series of multivariate analyses of variance (MANOVAs) with two maximum peat thickness thresholds, a first fixed at 60 cm and a second incremental threshold.

Threshold (cm)	60/80	60/90	60/100	60/110	60/120	60/130	60/140	60/150	60/160	60/170
N1/N2/N3	12/7/95	12/10/92	12/15/87	12/19/83	12/25/77	12/32/70	12/37/65	12/40/62	12/51/51	12/58/44
Pillai's trace	0.295	0.297	0.302	0.299	0.306	0.324	0.326	0.330	0.331	0.334
Pillai's lower bound (2.5%)	0.253	0.264	0.276	0.277	0.278	0.297	0.294	0.291	0.297	0.295
Pillai's upper bound (97.5%)	0.459	0.461	0.458	0.450	0.459	0.474	0.478	0.481	0.478	0.482
Number of significant ANOVAs/53	17	17	18	18	18	19	19	19	19	18

**Note:** The number of observations per group (N1/N2/N3), Pillai's trace and its 95% confidence interval limits, and the number of significant analyses of variance (ANOVAs) between the groups out of 53 tested variables are also given. All MANOVAs are significant at  $p < 0.001$ .

**Table 3.** Mean and standard error (SE) of 17 significantly different variables between Group 1 (<60 cm) and Group 2 (>60 cm).

Variable	Depth (cm)	F value (1;112)	p value	Group 1 N = 12		Group 2 N = 102	
				Mean	SE	Mean	SE
Total carbon content (%)	0–20	50.59	<0.0001	33.74	0.93	43.31	0.32
	20–40	47.29	<0.0001	34.05	1.00	43.98	0.34
	40–60	51.5	<0.0001	21.39	1.87	44.92	0.64
Organic matter content (%)	0–20	44.59	<0.0001	66.27	1.68	84.60	0.58
	20–40	45.78	<0.0001	66.19	1.88	85.63	0.64
	40–60	49.53	<0.0001	40.30	3.54	87.09	1.21
Bulk density (g·cm <sup>-3</sup> )	0–5	25.76	<0.0001	0.38	0.02	0.29	0.01
	50–55	15.83	0.000123	0.64	0.05	0.18	0.02
C/N ratio (-)	0–20	39.08	<0.0001	17.27	0.97	22.87	0.33
	20–40	41.44	<0.0001	17.05	1.10	23.44	0.38
	40–60	62.47	<0.0001	15.53	1.21	23.96	0.42
Electrical conductivity (μS·cm <sup>-1</sup> )	20–40	19.71	<0.0001	862.25	53.58	515.98	18.38
	40–60	31.41	<0.0001	1,272.50	81.09	513.47	27.82
Air content at -5 kPa (cm <sup>3</sup> ·cm <sup>-3</sup> )	50–55	15.33	0.000156	0.11	0.02	0.19	0.01
Available water content at -10 kPa (cm <sup>3</sup> ·cm <sup>-3</sup> )	50–55	22.88	<0.0001	0.10	0.02	0.18	0.01
Mean fiber content (%)	-	56.46	<0.0001	4.16	2.18	23.13	0.75
Mean rubbed fiber content (%)	-	43.02	<0.0001	1.43	1.27	8.52	0.44


**Note:** p values are given for analyses of variance (ANOVAs) on transformed data, while means and SEs are for ANOVAs on raw data.

ing early signs of degradation. The thicker the cultivable peaty layer, the higher the organic matter content and C/N ratio. The organic matter content doubles from Group 1 to Group 2. Concerning the thickness of the coprogenous layer, it seems that sites from Group 2 have a thicker layer in average.


### Spatial distribution of management zones at a regional scale

Predictive maps of the depth to the mineral layer and of the coprogenous layer thickness were produced with this study's data set combined with other data sets gathered within the last 10 years (Fig. 11). By subtracting the latter from the for-

**Fig. 4.** Violin plots of the organic matter content according to the degradation group at three sampled depths: (A) 0–20 cm, (B) 20–40 cm, and (C) 40–60 cm. [Colour online]

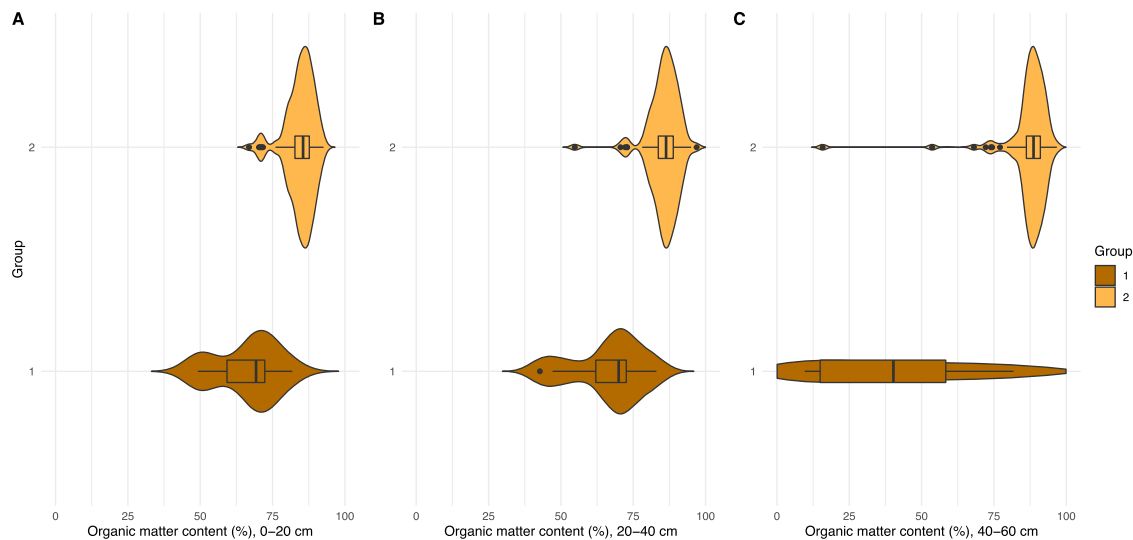

**Fig. 5.** Violin plots of the bulk density according to the degradation group at two sampled depths: (A) 0–5 cm and (B) 50–55 cm. [Colour online]

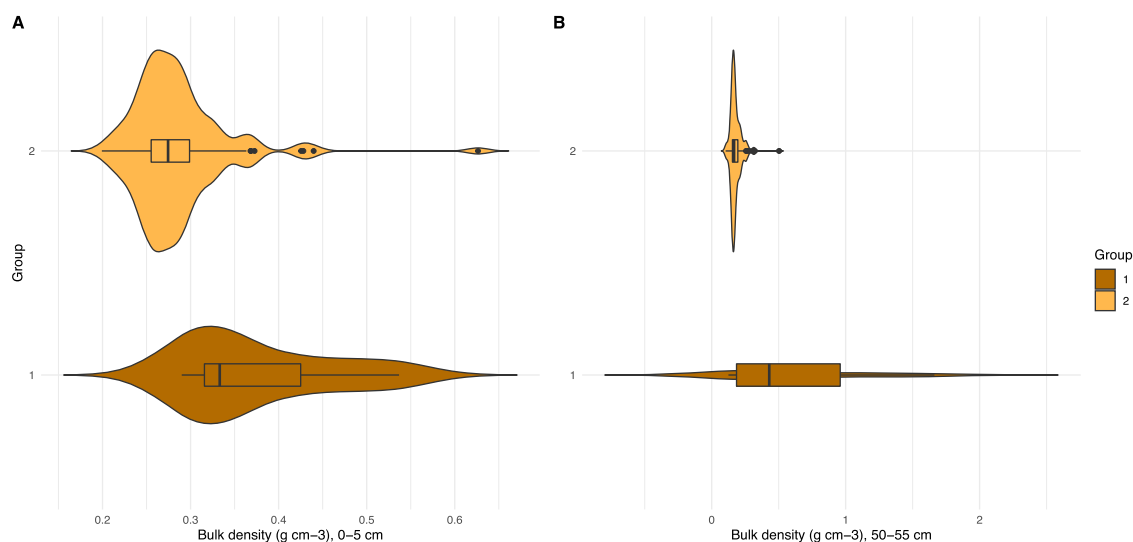


mer map, the MPT was estimated at a regional scale. Both final maps were generated using the cubist machine-learning model with digital soil mapping techniques. Environmental covariates gathered for the study area were spatially intersected with the georeferenced soil observations to act as predictors of the depth to the mineral layer and to the coprogenous layer thickness. One should note that prediction errors added up, augmenting the prediction uncertainty in each location of the final map. The complete workflow can be found in Deragon et al. (2022). Both MPT thresholds of 60 and 100 cm were applied to the final map. Each cell of 10 m spatial resolution was classified to illustrate the distribution of soil degradation groups across the study area that form distinct management zones. Although predictive maps were generated for the complete extent of each peatland, only fields of the 14 research-partner farms are shown in Fig. 11.


First, it is possible to see that soils with a negative depth are predicted (black areas, Fig. 11). These areas can be seen where a thick coprogenous layer was predicted and subtracted from a shallower predicted depth to the mineral soil. Nonetheless, this group only represents 0.6% of the study area (Table 5).

Second, degraded soils (Group 1) are mostly found near the borders of peatlands, which was expected, but it is not limited to this spatial pattern. A more degraded zone can be found near the centre of the southwest peatland. This zone is associated with deep organic deposits with a thick coprogenous layer. The peatland to its right is subject to a higher concentration of degraded soils. This concentration can be explained by a shallower deposit or the number of years since land conversion for agriculture of the fields at this location. Land use and annual loss can also affect the speed at which soil resources are lost.

**Fig. 6.** Violin plots of electrical conductivity according to the degradation group at two sampled depths: (A) 20–40 cm and (B) 40–60 cm. [Colour online]

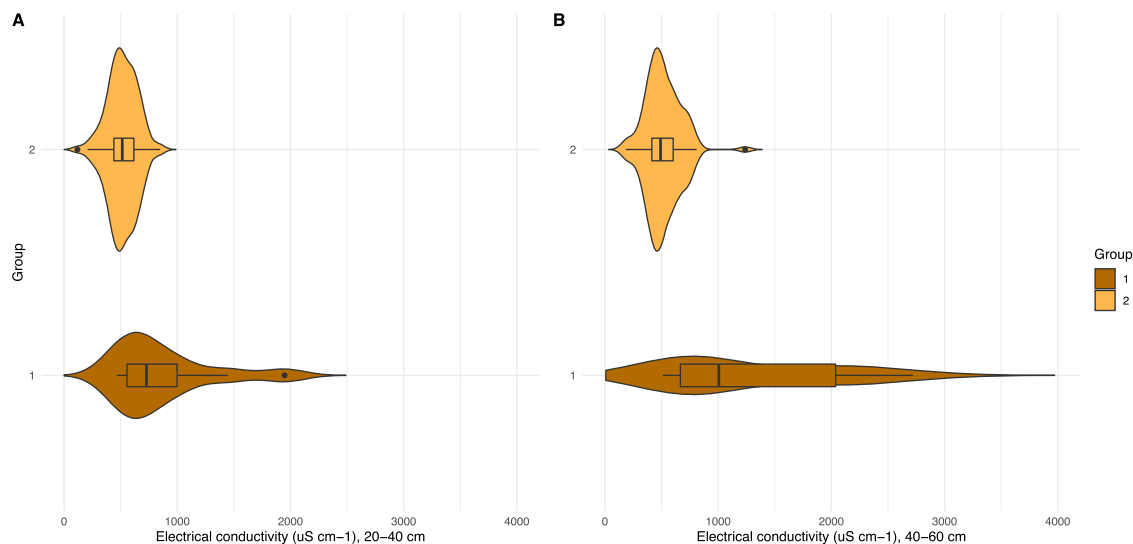

**Fig. 7.** Violin plots (A) of air content at  $-5$  kPa and (B) of available water content at  $-10$  kPa according to the degradation group at a sampling depth of 50–55 cm. [Colour online]

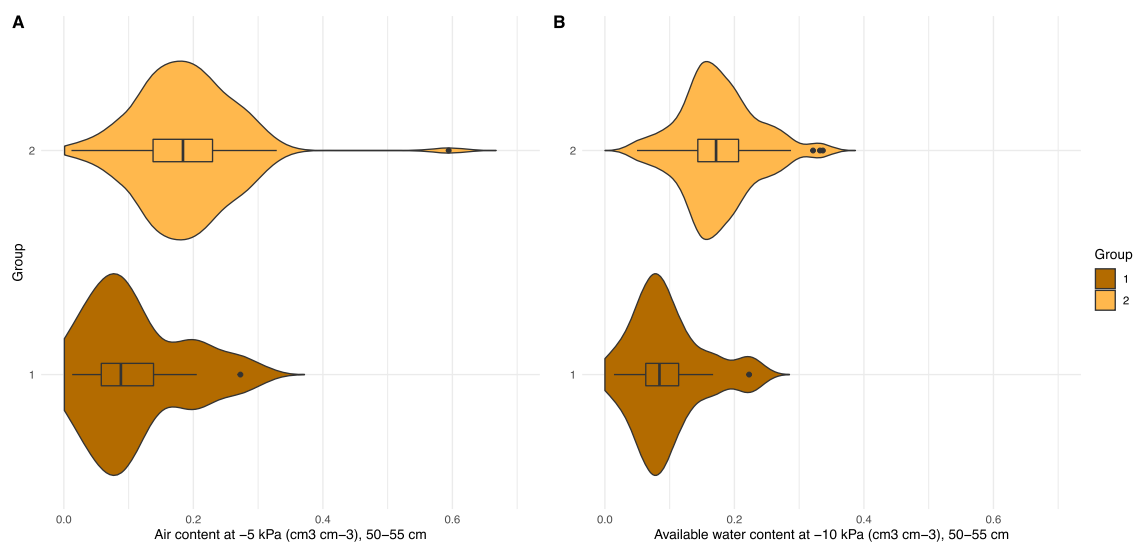


To rephrase the importance of these results for soil conservation practices, 63.7% of the study area has an MPT higher than 1 m (Group 3). A fifth of the study area is at risk (Group 2), while 15.6% of the area is already degraded (Group 1). Also, the 14 farms do not share the same distribution of management zones over their land.

## Discussion


The proposed approach, based on the MPT, allowed the definition of a 60 cm MPT threshold related to a significant change in organic soil properties and a 100 cm MPT threshold related to drainage considerations. Therefore, three groups related to soil degradation were formed (MPT < 60,

60 < MPT < 100, and MPT > 100 cm). Indeed, if the 60 cm MPT threshold is the answer to the question “At which maximum peat thickness a soil is sufficiently degraded to affect its properties?”, it does not answer the question “At which maximum peat thickness should we start intensive soil conservation practices?”. Since these practices have a related cost, it is imperative to apply them before a given field gets close to or under an MPT of 60 cm. In other words, soils with an MPT < 60 cm are degraded, while soils between 60 and 100 cm would be targeted for the application of intense and costly soil conservation practices to maintain soil productivity, and soils with an MPT > 100 cm would not be considered priority intervention zones. One should note that basic soil conservation practices should be applied no matter what the MPT depth (i.e., cover crops after harvest, controlled traffic farming, irri-

**Fig. 8.** Violin plots of the (A) mean fiber content and (B) mean rubbed fiber content of the maximum peat thickness. The fiber and rubbed fiber content (in percentage) of every organic soil layer of the soil profile was multiplied by their corresponding layer thickness. Then, all values were summed up and divided by the maximum peat thickness of that site. [Colour online]

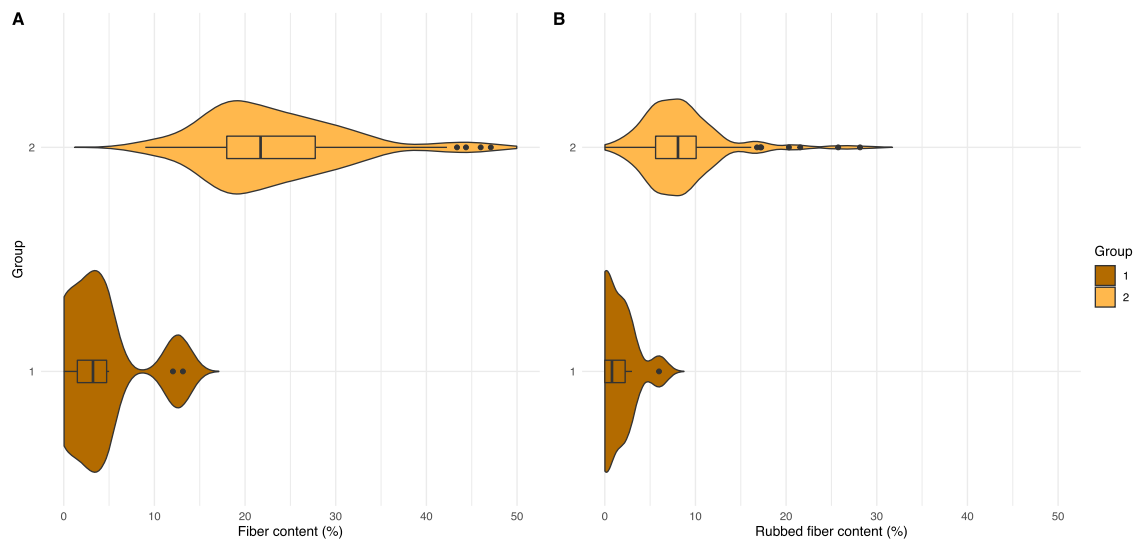

**Fig. 9.** Violin plots of the C/N ratio according to the degradation group at three sampled depths: (A) 0–20 cm, (B) 20–40 cm, and (C) 40–60 cm. [Colour online]

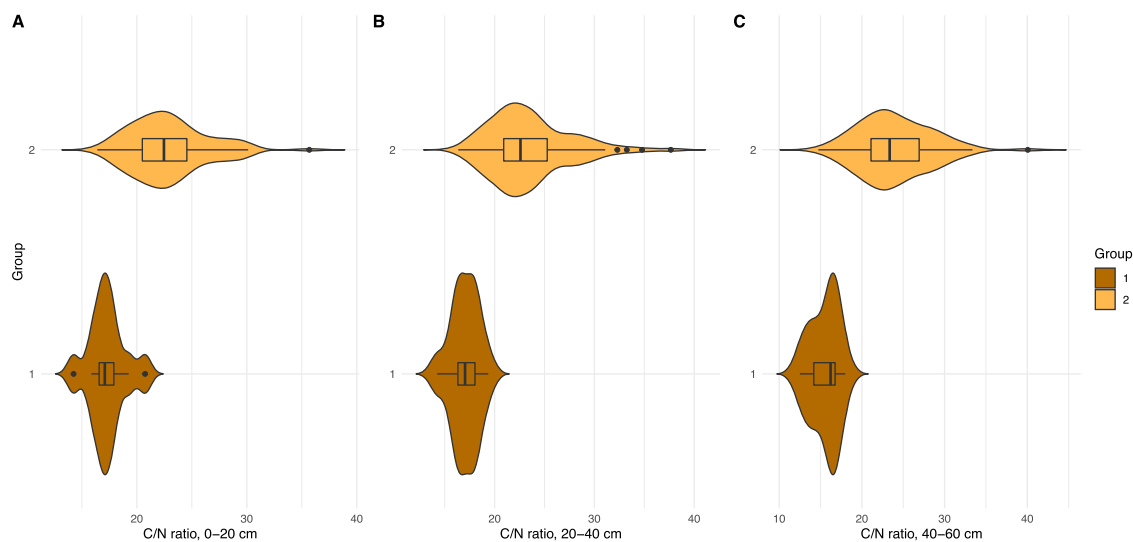


gation during windy periods, shelterbelts, etc.), but intensive and more costly measures such as the addition of biomass crop amendments (Dessureault-Romproux et al. 2020, 2022) should be targeting soils that are near 60 cm. Since the practical MPT threshold of 100 cm is not supported by statistical evidence, knowledge of conservation practices efficiency and costs should be integrated in the future to support or modify the proposed threshold. Pillai's trace of 0.495 indicated a moderate relationship between degradation groups and DVs. This result suggests that other degradation indicators should be studied to obtain a stronger relationship. Such indicators could include the number of years since land conversion to agriculture, the botanical origin and type of wetland, and agricultural practices. Furthermore, outliers in Figs. 4C, 5A, and 10C support this observation, hinting toward a need for

other properties to obtain a better distinction between soil degradation groups.

The properties presented in Tables 3 and 4 indicated that shallower soils (Group 1) are relatively more degraded than deeper soils (Groups 2 and 3). These properties are mostly related to the carbon content, C/N ratio, bulk density, soil salinity, and WRC. The results are coherent with the expected change in Organic soils properties after drainage. The observed loss of porosity concurs with expectations (Brandyk et al. 2003; Ilnicki and Zeitz 2003; Okruszko and Ilnicki 2003; Hallema et al. 2015b). Decomposition of surface layers leads to modifications of the C/N ratio, which was also observed, since nitrogen is mineralized and carbon is released by microorganism respiration (Ilnicki and Zeitz 2003; Anshari et al. 2010; Kruger et al. 2015).

**Fig. 10.** Violin plots of the total carbon content according to the degradation group at three sampled depths: (A) 0–20 cm, (B) 20–40 cm, and (C) 40–60 cm. [Colour online]

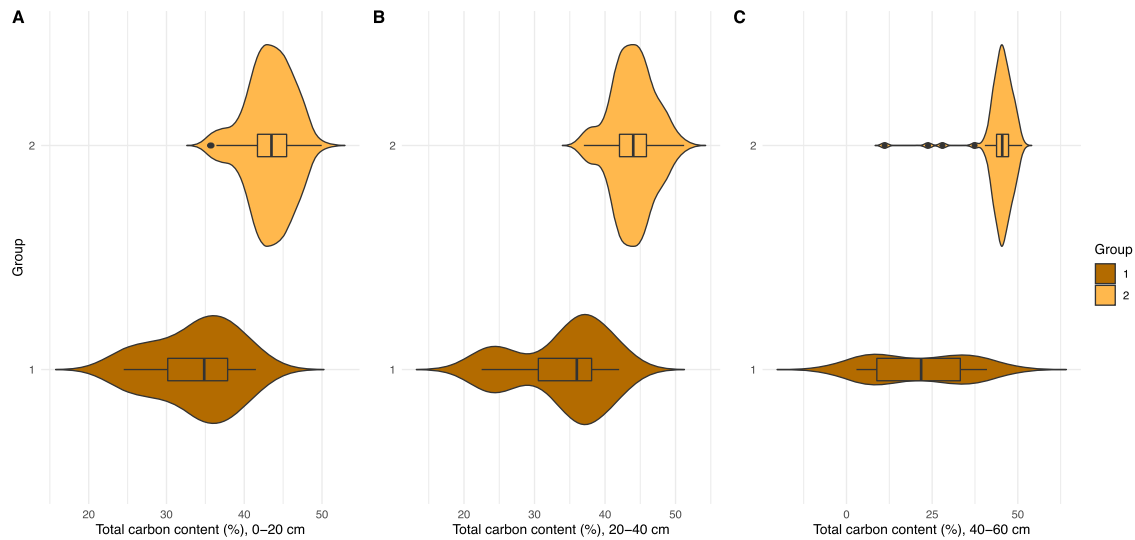

**Table 4.** Mean and standard error (SE) of 18 significantly different variables between Group 1 (<60 cm), Group 2 (60–100 cm), and Group 3 (>100 cm).


Variable	Depth (cm)	F value (2;111)	p value	Group 1 N = 12		Group 2 N = 15		Group 3 N = 87	
				Mean	SE	Mean	SE	Mean	SE
Total carbon content (%)	0–20	28.9	<0.0001	33.74a	0.92	41.64b	0.82	43.60b	0.34
	20–40	24.75	<0.0001	34.05a	0.99	42.87b	0.89	44.17b	0.37
	40–60	26.71	<0.0001	21.39a	1.85	41.96b	1.66	45.43b	0.69
Organic matter content (%)	0–20	24.14	<0.0001	66.27a	1.65	81.83b	1.48	85.08b	0.61
	20–40	35.22	<0.0001	66.19a	1.86	82.89b	1.66	86.10b	0.69
	40–60	25.12	<0.0001	40.30a	3.43	79.24b	3.07	88.44c	1.28
Bulk density (g·cm <sup>-3</sup> )	0–5	13.21	<0.0001	0.38a	0.02	0.30b	0.02	0.28b	0.01
	50–55	7.846	0.00065	0.64a	0.05	0.19b	0.05	0.18b	0.02
C/N ratio (–)	0–20	20.77	<0.0001	17.27a	0.96	21.85b	0.86	23.05b	0.36
	20–40	21.88	<0.0001	17.05a	1.10	22.37b	0.98	23.63b	0.41
	40–60	36.4	<0.0001	15.53a	1.19	21.61b	1.06	24.37c	0.44
Electrical conductivity (μS·cm <sup>-1</sup> )	20–40	10.02	0.0001	862.25a	53.73	490.07b	48.06	520.45b	19.96
	40–60	15.76	<0.0001	1,272.50a	81.45	523.38b	72.85	511.77b	30.25
Air content at –5 kPa (cm <sup>3</sup> ·cm <sup>-3</sup> )	50–55	7.595	0.00081	0.11a	0.02	0.18b	0.02	0.19b	0.01
Available water content at –10 kPa (cm <sup>3</sup> ·cm <sup>-3</sup> )	50–55	11.82	<0.0001	0.10a	0.02	0.16b	0.01	0.18b	0.01
Mean fiber content (%)	-	29.38	<0.0001	4.16a	2.18	21.44b	1.95	23.42b	0.81
Mean rubbed fiber content (%)	-	22.73	<0.0001	1.43a	1.27	7.75b	1.14	8.65b	0.47
Thickness of the coprogenous layer (cm)	0–160	18.26	<0.0001	22.83a	5.60	45.40b	5.01	8.07c	2.08

**Note 1:** p values are given for analyses of variance (ANOVAs) on transformed data, while means and standard errors are for ANOVAs on raw data. Multiple comparisons made with the Tukey’s adjustment method. Different letters indicate a significant difference between groups with a significance level of alpha = 0.05.

Concerning higher salinity in more degraded soils, this observation could be linked to a migration of solutes by capillarity rise from underlying, saltier mineral and coprogenous layers, fertilization, or saline irrigation water. Salinity sensitivity of vegetable crops can vary significantly. Crops commonly found in the study area, such as carrots

(1000 μS·cm<sup>-1</sup>), onions (1200 μS·cm<sup>-1</sup>), celery (1800 μS·cm<sup>-1</sup>), lettuce (2000 μS·cm<sup>-1</sup>), and spinach (2000 μS·cm<sup>-1</sup>), are sensitive and moderately sensitive to soil salinity (Machado and Serralheiro 2017). Possible yield loss can be expected when the soil salinity exceeds these thresholds. This was the case in most degraded sites.

**Fig. 11.** Regional map of maximum peat thickness management zones based on the proposed thresholds: 60 cm and 100 cm. [Colour online]

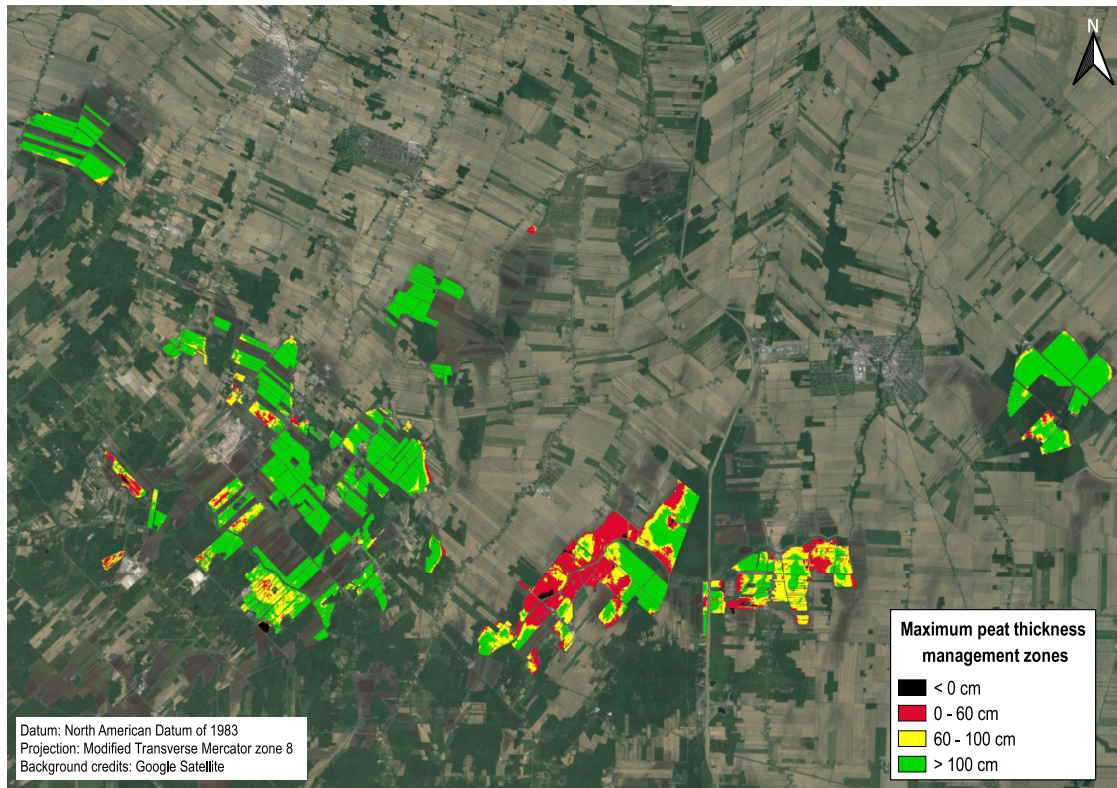

**Table 5.** Predicted area corresponding to the maximum peat thickness (MPT) management zones at a regional scale.

MPT zones (cm)	Area (ha)	Percentage
<0	21	0.6%
0–60	541	15.6%
60–100	700	20.1%
>100	2212	63.7%
Total:	3474	100%

The lower fiber content in soils from Group 1 can be attributed to a more advanced stage of degradation. Chemical and physical alterations are more important near the surface with the presence of oxygen and with tillage (Ilnicki and Zeitz 2003; Kroetsch et al. 2011; Pawluczuk et al. 2019). Moreover, the mean surface bulk densities from each of the two groups exceeded the  $0.2 \text{ g cm}^{-3}$  threshold proposed by Liu and Lennartz (2019). This result can be explained by soil degradation mostly occurring at this depth. With tillage, soil aggregates and peat residues break down into particles that can rearrange themselves and interlock in a more compacted structure (Okruszko and Ilnicki 2003). The mean bulk density at 50–55 cm shows a different result. Indeed, deeper soils have lower values of bulk density, while shallower soils have values around three times the threshold. A higher density of mineral particles contributed to higher bulk densities in

group 1. Wang et al. (2021) found a significant difference in Ksat and bulk density values between degrees of degradation of peat soils, whereas in this study, only bulk density was significantly different between soil degradation groups related to the MPT. Other factors, such as botanical origin, can have a major impact on Ksat and were not accounted for in our study. Soil air content is a physical property related to soil compaction and essential to gas diffusion. The observed values are inferior to the threshold proposed by Caron and Michel (2021) for shallower soils. Accordingly, the available water content is also inferior.

A practical application of the results would suggest that soils under 60 cm, in which vegetable crops will undoubtedly have a shallower rooting depth, also have a lower water retention capacity and limiting gas diffusion properties. This results in an agronomically undesired growing medium for crops with major consequences on irrigation practices: applied quantities and optimal timing for irrigation must be adapted. Soil properties significantly different between groups will be used as discriminant properties to help manage fields in a soil conservation context. That being said, the studied soil properties should not be limited to the 17 variables previously mentioned. For instance, Ksat is a key physical property for drainage plans and should also be integrated in a wider decision frame when it comes to soil management, given the magnitude of degradation of a particular field. Furthermore, our studies were already ongoing when Sienkiewicz et al. (2019) suggested the use of the ratio be-

tween dissolved organic carbon and soil organic carbon as a better indicator of soil degradation. This ratio could be explored in the future to perhaps witness a bigger effect of the MPT on the DVs. The MPT management zone map showed visible contrasts between peatlands. The presence of spatial patterns of soil degradation can have major implications on conservation costs. The distribution of the 14 research-partner farms is not homogeneous. For instance, four farms would be severely impacted by soil degradation. Located in the southeast peatland where a great concentration of soil under 60 cm was predicted, this could potentially mean that their soil is already severely affected by soil degradation and that soil resources are limited. Therefore, more conservation practices should be put in place compared with farms completely found in  $MPT > 100$  cm areas.

### Limitations of this study and future work

There are limitations to the use of the MPT. Little is known about soil volume changes due to seasonal and shrinkage–swelling cycles (Ilnicki and Zeitz 2003) at a field scale. Uncertainty related to the evaluation of the MPT at a given point over the years is thus unknown. The magnitude and duration of these cycles may likely vary with space, necessitating complex predictive models calibrated with samples (Camporese et al. 2006; Morton and Heinemeyer 2019). Grading operations should also be considered since they can affect the MPT. These variations could not only affect some properties but also change the soil management zone classification of a site. Grading could have had a potential effect on this study for sites visited over two years.

Furthermore, available techniques to measure peat depth do not always discriminate coprogenous materials from peat and the mineral layer. They all have uncertainties, whether it is manual probing or proximal sensing-based methods (Parry et al. 2014; Ji et al. 2019). The predictive map of the MPT only allows visualization of trends and gradients at a regional scale. Its associated uncertainty is high, and it would be advised to use it as a complementary tool until further research is performed with a bigger data set. It is also important to note that our study did not differentiate between soil degradation of shallower deposits near a peatland border (i.e., degradation linked to the peatland's genesis) and degradation related to anthropic activity. Furthermore, one should not assume that human activity alone causes the shallowness of soils observed near peatland borders.

The initial sampling design goal was to provide as much information as possible on the depth and diversity of soil properties at a regional scale by covering both problematic and good fields. Another goal was to obtain data on the depth of the organic deposits in three of the peatlands that were not covered in prior studies. Legacy soil data available for these peatlands, in the form of pedological reports, were acquired at different time periods (1950, 2000, and 2001), and no maps of the depth to the mineral layer or the coprogenous layer thickness were produced. Now that such maps exist, they could be used to elaborate a more robust sampling scheme, meaning one could use a stratified sampling design to sample sites with regular MPT increments of 10 cm. This

methodology would increase the number of observations in the shallower soil group and more statistical robustness can be expected. More observations would be needed to obtain more robust conclusions, although they remain valid. Due to time and budget constraints, expert knowledge was used to determine the location of the sites. Although not rigorous, interesting results have been found and will further be investigated.

### Conclusion

The MPT of cultivated Organic soils appeared to be a property effectively related to soil degradation. This property could be used to help manage soil conservation practices. A rich database of soil properties at three depths was assembled to help monitor soil degradation. Seventeen soil properties differed significantly between groups formed with two proposed MPT thresholds of 60 and 100 cm. Three management zones were derived to assess soil resource distribution and to facilitate the determination of priority intervention zones. To improve the methodology, it is crucial to consider other data to elaborate an efficient and complete soil conservation plan. For instance, soil degradation factors (soil erosion loss quantification and mineralization rates) and the potential of soil conservation practices (effectiveness and impact on peat decay) must be part of the decision-making process. Indeed, certain deeper zones can experience higher soil loss rates than a shallower one. In other words, the approach should further be explored by integrating other decision-making criteria to determine intervention zones.

### Acknowledgement

The authors are thankful to Diane Bulot for her help with laboratory analyses.

### Article information

#### History dates

Received: 6 October 2021

Accepted: 19 February 2022

Version of record online: 19 August 2022

#### Notes

This paper is part of a Collection entitled “Soil Health Evaluation: Methods and Directions”.

#### Copyright

© 2022 The Author(s). This work is licensed under a [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/) (CC BY 4.0), which permits unrestricted use, distribution, and reproduction in any medium, provided the original author(s) and source are credited.

### Author information

#### Author ORCIDs

Raphaël Deragon <https://orcid.org/0000-0002-2912-386X>

## Competing interests

The authors declare that there are no competing interests

## Funding information

The authors are thankful for the financial support from the Canadian Graduate Scholarship program by the Natural Sciences and Engineering Research Council of Canada (NSERC) and the Master's Scholarship program (B1X) by the Fonds de recherche du Québec — Nature et technologies granted to R.D. We also acknowledge the financial support of the NSERC through an Industrial Research Chair Grant in Conservation and Restoration of Cultivated Organic Soils (IRCPJ 411630-17) in partnership with Delfland Inc., Productions Maraîchères Breizh Inc., La Production Barry Inc., Les Fermes R.R. et Fils Inc., Le Potager Montréalais Ltée, R. Pinsonneault et Fils Ltée, Patate Isabelle Inc., Les Fermes du Soleil Inc., Les Jardins A. Guérin et Fils Inc., Le Potagers Riendeau Inc., Vert Nature Inc., Fermes Hotte et Van Winden Inc., Production Horticole Van Winden, and Maraichers J.P.L. Guerin and Fils.

## References

- Anshari, G., Afifudin, M., Nuriman, M., Gusmayanti, E., Arianie, L., Susana, R., et al. 2010. Drainage and land use impacts on changes in selected peat properties and peat degradation in West Kalimantan Province, Indonesia. *Biogeosciences*, **7**(11): 3403–3419. doi:10.5194/bg-7-3403-2010.
- Bengough, A.G., and Mullins, C.E. 1990. Mechanical impedance to root growth: a review of experimental techniques and root growth responses. *J. Soil Sci.* **41**(3): 341–358. doi:10.1111/j.1365-2389.1990.tb00070.x.
- Brandyk, T., Szatylowicz, J., Oleszczuk, R., and Gnatowski, T. 2003. Water-related physical attributes of organic soils. Organic soils and peat materials for sustainable agriculture. CRC Press, Boca Raton, FL. pp. 33–66.
- Camporese, M., Ferraris, S., Putti, M., Salandin, P., and Teatini, P. 2006. Hydrological modeling in swelling/shrinking peat soils. *Water Resour. Res.* **42**(6). doi:10.1029/2005WR004495.
- Caron, J., and Michel, J.-C. 2021. Understanding and optimizing the physical properties of growing media for soilless cultivation. In *Advances in horticultural soilless culture*. Burleigh Dodds Science Publishing, Cambridge, UK. pp. 107–138. doi:10.19103/AS.2020.0076.04.
- Centre d'expertise en analyse environnementale du Québec. 2014. Détermination du pH: méthode électrométrique, MA. 100 – pH 1.1, Rév. 3, Ministère du Développement durable, de l'Environnement, de la Faune et des Parcs du Québec, 11 p. Available from <http://www.ceae.qc.ca/methodes/pdf/MA100pH11.pdf>.
- Conseil des Productions Végétales du Québec Inc. 1988. Préparation des échantillons de sol, Agdex 533, Méthode PR-1, 2 p.
- Conseil des Productions Végétales du Québec Inc. 1997a. Méthodes d'analyse des propriétés physiques des milieux artificiels, des tourbes et des sols organiques. Courbe de rétention. p. 10
- Conseil des Productions Végétales du Québec Inc. 1997b. Méthodes d'analyses des propriétés physiques des milieux artificiels, des tourbes et des sols organiques. Estimation de la distribution des particules (granulométrie). p. 4.
- Deragon, R., Saurette, D.D., Heung, B., and Caron, J. 2022. Mapping the maximum peat thickness of cultivated Organic soils in the south-west plain of Montreal. *Canadian Journal of Soil Science*. doi:10.1139/CJSS-2022-0031
- Dessureault-Rompré, J., Gloutney, A., and Caron, J. 2022. Nutrient availability for *Lactuca sativa* cultivated in an amended peatland: an ionic exchange study. *Nitrogen*, **3**(1): 26–42. doi:10.3390/nitrogen3010002.
- Dessureault-Rompré, J., Libbrecht, C., and Caron, J. 2020. Biomass crops as a soil amendment in cultivated histosols: can we reach carbon equilibrium? *Soil Sci. Soc. Am. J.* **84**(2): 597–608. doi:10.1002/saj2.20051.
- Dessureault-Rompré, J., Theriault, L., Guedessou, C., and Caron, J. 2018. Strength and permeability of cultivated histosols characterized by differing degrees of decomposition. *Vadose Zone J.* **17**(1): 180156. doi:10.2136/vzj2017.08.0156.
- Driessen, P., Deckers, J., Spaargaren, O., and Nachtergaele, F. 2000. Lecture notes on the major soils of the world. Food and Agriculture Organization (FAO), Rome.
- Esselami, D., Boudache, M., and Grenon, L. 2014. L'évolution des terres noires et le problème de la compaction. Prisme Consortium. Présentation donnée aux journées horticoles. Available from [https://www.mapaq.gouv.qc.ca/SiteCollectionDocuments/Regions/Monteregion-Ouest/Journees\\_horticoles\\_2014/4\\_decembre/Terres\\_noires/9h05\\_b\\_JH2014\\_profil\\_compaction\\_DEssalami.pdf](https://www.mapaq.gouv.qc.ca/SiteCollectionDocuments/Regions/Monteregion-Ouest/Journees_horticoles_2014/4_decembre/Terres_noires/9h05_b_JH2014_profil_compaction_DEssalami.pdf)
- Expert Committee on Soil Survey. 1982. The Canada Soil Information System (CanSIS): manual for describing soils in the field, 1982 revised. Land Resource Research Institute, Research Branch, Agriculture Canada, Ottawa. LRRI Contribution no 82-52. pp. 166.
- Gnatowski, T., Szatylowicz, J., Brandyk, T., and Kechavarzi, C. 2010. Hydraulic properties of fen peat soils in Poland. *Geoderma*, **154**(3): 188–195. doi:10.1016/j.geoderma.2009.02.021.
- Groupe AGÉCO. 2007. Portrait et priorités du secteur maraîcher québécois; Rapport final. Available from [https://www.mapaq.gouv.qc.ca/ff/Publications/Portrait\\_secteurmaraicher.pdf](https://www.mapaq.gouv.qc.ca/ff/Publications/Portrait_secteurmaraicher.pdf)
- Guedessou, C.V. 2020. Modélisation de systèmes de drainage des sols organiques cultivés sujets à la compaction et au tassement. Ph.D. Thesis, Université Laval, Québec.
- Hallema, D., Lafond, J., Periard, Y., Gumiere, S.J., Sun, G., and Caron, J. 2015a. Long-term effects of peatland cultivation on soil physical and hydraulic properties: case study in Canada. *Vadose Zone J.* **14**(6): 1–12. doi:10.2136/vzj2014.10.0147.
- Hallema, D.W., Périard, Y., Lafond, J.A., Gumiere, S.J., and Caron, J. 2015b. Characterization of water retention curves for a series of cultivated Histosols. *Vadose Zone J.* **14**(6): 1–8. doi:10.2136/vzj2014.10.0148.
- Hao, X., Ball, B.C., Culley, J.L.B., Carter, M.R., and Parkin, G.W. 2007. Soil density and porosity. In *Soil sampling and methods of analysis*. 2nd ed. CRC Press, Boca Raton, FL. pp. 743–760.
- Hendershot, W.H., Lalonde, H., and Duquette, M. 2007. Soil reaction and exchangeable acidity. In *Soil sampling and methods of analysis*. 2nd ed. CRC Press, Boca Raton, FL. pp. 173–178.
- Ilnicki, P. 2003. Agricultural production systems for organic soil conservation. In *Organic soils and peat materials for sustainable agriculture*. CRC Press, Boca Raton, FL. pp. 209–221.
- Ilnicki, P., and Zeitz, J. 2003. Irreversible loss of organic soil functions after reclamation. In *Organic soils and peat materials for sustainable agriculture*. CRC Press, Boca Raton, FL. pp. 15–32.
- Ji, W., Adamchuk, V.I., Chen, S., Mat Su, A.S., Ismail, A., Gan, Q., et al. 2019. Simultaneous measurement of multiple soil properties through proximal sensor data fusion: a case study. *Geoderma*, **341**: 111–128. doi:10.1016/j.geoderma.2019.01.006.
- Kroetsch, D.J., Geng, X., Chang, S.X., and Saurette, D.D. 2011. Organic soils of Canada: part 1. Wetland organic soils. *Can. J. Soil Sci.* **91**(5): 807–822. doi:10.4141/cjss10043.
- Krüger, J.P., Leifeld, J., Glatzel, S., Szidat, S., and Alewell, C. 2015. Biogeochemical indicators of peatland degradation: a case study of a temperate bog in northern Germany. *Biogeosciences*, **12**(10): 2861–2871. doi:10.5194/bg-12-2861-2015.
- Lafond, J.A., Gumiere, S.J., Hallema, D.W., Périard, Y., Jutras, S., and Caron, J. 2015. Spatial distribution patterns of soil water availability as a tool for precision irrigation management in histosols: characterization and spatial interpolation. *Vadose Zone J.* **14**(6): 1–13. doi:10.2136/vzj2014.10.0140.
- Lamontagne, L., Martin, A., and Nolin, M.C. 2014. Étude pédologique du comté de Napierville (Québec). In *Laboratoires de pédologie et d'agriculture de précision, Centre de recherche et de développement sur les sols et les grandes cultures, Direction générale des sciences et de la technologie, Agriculture et Agroalimentaire Canada, Québec (Québec)*.
- Liu, H., and Lennartz, B. 2019. Hydraulic properties of peat soils along a bulk density gradient: a meta study. *Hydrol. Process.* **33**(1): 101–114. doi:10.1002/hyp.13314.
- Liu, H., Janssen, M., and Lennartz, B. 2016. Changes in flow and transport patterns in fen peat following soil degradation. *Eur. J. Soil Sci.* **67**(6): 763–772. doi:10.1111/ejss.12380.



- López, M.V., de Dios Herrero, J.M., Hevia, G.G., Gracia, R., and Buschiazzo, D.E. 2007. Determination of the wind-erodible fraction of soils using different methodologies. *Geoderma*, **139**(3): 407–411. doi:[10.1016/j.geoderma.2007.03.006](https://doi.org/10.1016/j.geoderma.2007.03.006).
- Machado, R., and Serralheiro, R. 2017. Soil salinity: effect on vegetable crop growth management practices to prevent and mitigate soil salinization. *Horticulturae*, **3**(2): 30–30. doi:[10.3390/horticulturae3020030](https://doi.org/10.3390/horticulturae3020030).
- Mann, K.L. 1986. Changes in soil carbon storage after cultivation. *Soil Sci.* **142**(5): 279–288. doi:[10.1097/00010694-198611000-00006](https://doi.org/10.1097/00010694-198611000-00006).
- MAPAQ. 2018. Portrait: diagnostic sectoriel des légumes frais au Québec. Available from <https://www.mapaq.gouv.qc.ca/fr/Publications/Portraitsectoriellegumesfrais.pdf>
- Ministère du Développement Durable, de l'Environnement et de la Lutte contre les Changements Climatiques du Québec. 2017. Détermination des solides totaux et des solides totaux volatils: méthode gravimétrique, MA. 100 – S.T. 1.1, Rév. 5, Centre d'expertise en analyse environnementale du Québec, 13 p.
- Morton, P.A., and Heinemeyer, A. 2019. Bog breathing: the extent of peat shrinkage and expansion on blanket bogs in relation to water table, heather management and dominant vegetation and its implications for carbon stock assessments. *Wetl. Ecol. Manag.* **27**(4): 467–482. doi:[10.1007/s11273-019-09672-5](https://doi.org/10.1007/s11273-019-09672-5).
- Okruszko, H., and Ilnicki, P. 2003. The moorsh horizons as quality indicators of reclaimed organic soils. Organic soils and peat materials for sustainable agriculture. CRC Press, Boca Raton, FL. pp. 1–14.
- Olson, C.L. 1974. Comparative robustness of six tests in multivariate analysis of variance. *J. Am. Stat. Assoc.* **69**(348): 894–908. doi:[10.1080/01621459.1974.10480224](https://doi.org/10.1080/01621459.1974.10480224).
- Parent, L.-É., and Caron, J. 2007. Physical properties of organic soils and growing media: particle size and degree of decomposition. *In* Soil sampling and methods of analysis. 2nd ed. CRC Press, Boca Raton, FL. pp. 871–884.
- Parent, L.-É., and Gagné, G. 2010. Guide de référence en fertilisation. 2nd ed. Centre de référence en agriculture et agroalimentaire du Québec (CRAAQ), Québec, Canada.
- Parry, L.E., West, L.J., Holden, J., and Chapman, P.J. 2014. Evaluating approaches for estimating peat depth. *J. Geophys. Res. Biogeosci.* **119**(4): 567–576. doi:[10.1002/2013JG002411](https://doi.org/10.1002/2013JG002411).
- Pawluczuk, J., Stepien, A., and Alberski, J. 2019. Physical and chemical properties of organic soils in connection with habitat conditions and the land use in the Dolina Rzeki Pasłęki Natura 2000 Site. *J. Elementol.* **24**(2).
- Peterson, R.A. 2020. Ordered quantile normalization: a semiparametric transformation built for the cross-validation era. *J. Appl. Stat.* **47**: 2312–2327.
- QGIS Development Team 2020. QGIS geographic information system. Open Source Geospatial Foundation Project. Available from <http://qgis.osgeo.org>.
- R Core Team 2020. R: a language and environment for statistical computing. R Foundation for Statistical Computing, Vienna, Austria.
- Revelle, W. 2020. psych: procedures for personality and psychological research, Northwestern University, Evanston, IL. Available from <https://CRAN.R-project.org/package=psych>, R package version 2.0.12.
- Reynolds, W.D. 2007. Saturated hydraulic properties: laboratory methods. *In* Soil sampling and methods of analysis. 2nd ed. CRC Press, Boca Raton, FL. pp. 1013–1024.
- Reynolds, W.D., and Clarke Topp, G. 2007. Soil water desorption and imbibition: tension and pressure techniques. *In* Soil sampling and methods of analysis. 2nd ed. CRC Press, Boca Raton, FL. pp. 891–998.
- Shein, E., Pozdnyakova, A., Shvarov, A., Il'in, L., and Sorokina, N. 2018. Hydrophysical properties of the high-ash Lowmoor peat soils. *Eurasian Soil Sci.* **51**(10): 1214–1219. doi:[10.1134/S1064229318100113](https://doi.org/10.1134/S1064229318100113).
- Sheppard, S.C., and Addison, J.A. 2007. Soil sample handling and storage. *In* Soil sampling and methods of analysis. 2nd ed. CRC Press, Boca Raton, FL. pp. 39–50.
- Sienkiewicz, J., Grażyna, P., Ostrowska, A., and Gozdowski, D. 2019. Indicators of peat soil degradation in the Biebrza valley, Poland. *Environ. Prot. Nat. Resour.* **30**(2): 41–51. doi:[10.2478/oszn-2019-0009](https://doi.org/10.2478/oszn-2019-0009).
- Šimůnek, J., Genuchten, M.T., and Wendroth, O. 1998. Parameter estimation analysis of the evaporation method for determining soil hydraulic properties. *Soil Sci. Soc. Am. J.*, **62**(4): 894–905. doi:[10.2136/sssaj1998.03615995006200040007x](https://doi.org/10.2136/sssaj1998.03615995006200040007x).
- Soil Classification Working Group (SCWG). 1998. The Canadian system of soil classification. 3rd ed. Agriculture and Agri-Food Canada, Publication 1646, Ottawa. pp. 187.
- Tabachnick, B.G., and Fidell, L.S. 2013. Using multivariate statistics. 6th ed. Pearson Education, Boston, MA.
- van Asselen, S., Stouthamer, E., and Smith, N. 2010. Factors controlling peat compaction in alluvial floodplains: a case study in the cold-temperate cumberland marshes, Canada. *J. Sediment. Res.* **80**(1–2): 155–166. doi:[10.2110/jsr.2010.015](https://doi.org/10.2110/jsr.2010.015).
- Vepraskas, M.J., and Craft, C.B. 2015. Wetland soils: genesis, hydrology, landscapes, and classification. 2nd ed. CRC Press, Boca Raton, FL.
- Wang, M., Liu, H., and Lennartz, B. 2021. Small-scale spatial variability of hydro-physical properties of natural and degraded peat soils. *Geoderma*, **399**: 115123. doi:[10.1016/j.geoderma.2021.115123](https://doi.org/10.1016/j.geoderma.2021.115123).
- Zeitz, J., and Veltz, S. 2002. Soil properties of drained and rewetted fen soils. *J. Plant Nutr. Soil Sci.* **165**(5): 618–626. doi:[10.1002/1522-2624\(200210\)165:5\(618::AID-JPLN618\)3.0.CO;2-W](https://doi.org/10.1002/1522-2624(200210)165:5(618::AID-JPLN618)3.0.CO;2-W).

## Appendix 1

**Table A1.** Descriptive statistics of the final selection of 53 depth-property combinations.

Variable	Depth (cm)	N	Mean	SD	Median	Minimum	Maximum	Skewness	Kurtosis	Unit
C/N ratio	0–20	114	22.28	3.76	22.05	14.24	35.69	0.58	0.44	-
	20–40	114	22.77	4.28	22.26	14.24	37.66	0.77	0.69	
	40–60	114	23.07	4.92	22.81	12.50	40.06	0.32	0.20	
Electrical conductivity	0–20	114	665.55	243.24	638.00	233.00	1,630.00	1.25	2.58	$\mu\text{S}\cdot\text{cm}^{-1}$
	20–40	114	552.43	213.38	520.00	118.40	1,948.00	3.08	16.63	
	40–60	114	593.37	364.63	507.00	183.70	2,721.00	3.55	14.80	
Organic matter content	0–20	114	82.67	8.08	84.66	49.17	92.63	-2.06	5.03	% (w/w)
	20–40	114	83.58	8.82	85.55	42.72	96.91	-2.31	6.50	
	40–60	114	82.17	18.89	88.14	9.62	96.73	-2.78	6.92	
$\text{pH}_{\text{water}}$	0–20	114	5.56	0.35	5.56	4.52	6.52	-0.28	0.37	-
	20–40	114	5.54	0.37	5.60	4.56	6.36	-0.68	0.11	
	40–60	114	5.36	0.43	5.44	3.44	6.11	-1.13	2.33	
Sodium pyrophosphate index	0–20	114	54.29	23.52	53.81	13.76	111.66	0.26	-0.89	-
	20–40	114	49.76	24.18	46.34	9.32	112.87	0.51	-0.61	
	40–60	114	33.86	20.83	27.74	4.17	96.78	0.95	0.03	
Total carbon content	0–20	114	42.30	4.37	42.80	24.50	49.96	-1.54	3.40	% (w/w)
	20–40	114	42.93	4.60	43.50	22.50	51.22	-1.81	5.44	
	40–60	114	42.44	9.71	45.10	2.90	51.28	-2.68	6.65	
Total nitrogen content	0–20	114	1.92	0.22	1.92	1.40	2.42	0.08	-0.60	% (w/w)
	20–40	114	1.92	0.24	1.92	1.36	2.44	-0.03	-0.51	
	40–60	114	1.85	0.41	1.86	0.22	2.49	-1.63	3.86	
Air content at -5 kPa	0–5	114	0.22	0.06	0.22	0.07	0.41	0.35	0.57	$\text{cm}^3\cdot\text{cm}^{-3}$
	30–35	114	0.19	0.07	0.19	0.04	0.36	0.01	-0.06	
	50–55	114	0.18	0.08	0.18	0.01	0.59	0.99	4.52	
Available water content at -10 kPa	0–5	114	0.25	0.06	0.26	0.02	0.39	-0.64	0.92	$\text{cm}^3\cdot\text{cm}^{-3}$
	30–35	114	0.19	0.06	0.19	0.06	0.33	-0.02	-0.53	
	50–55	114	0.17	0.06	0.16	0.01	0.34	0.23	0.13	
Bulk density	0–5	114	0.29	0.07	0.28	0.20	0.63	2.21	6.77	$\text{g}\cdot\text{cm}^{-3}$
	30–35	114	0.25	0.07	0.25	0.13	0.45	0.47	0.09	
	50–55	114	0.23	0.23	0.17	0.10	1.66	4.64	22.26	
Saturated hydraulic conductivity	0–5	114	0.03	0.03	0.02	0.00	0.14	1.75	3.69	$\text{cm}\cdot\text{s}^{-1}$
	30–35	114	0.02	0.02	0.02	0.00	0.10	1.57	2.43	
	50–55	114	0.03	0.05	0.01	0.00	0.28	3.06	10.81	
Percentage of soil of diameter <0.84 mm	0–20	114	46.88	14.84	50.03	2.48	74.83	-0.73	0.26	% (w/w)
Maximal penetration resistance value	0–80	114	0.93	0.27	0.87	0.44	2.14	1.38	3.59	MPa

Continued

Variable	Depth (cm)	N	Mean	SD	Median	Minimum	Maximum	Skewness	Kurtosis	Unit
Depth of the maximal penetration resistance value	NA	114	51.58	23.04	52.50	10.00	75.00	-0.24	-1.58	cm
Maximal penetration resistance value in surface	10-40	114	0.81	0.24	0.77	0.39	2.04	1.61	5.34	MPa
Depth of the maximal penetration resistance value in surface	NA	114	31.49	8.67	35.00	10.00	40.00	-0.84	-0.26	cm
Mean penetration resistance	0-80	114	0.59	0.18	0.58	0.27	1.65	2.16	9.32	MPa
Total porosity	0-5	114	0.84	0.03	0.84	0.76	0.92	0.19	0.45	cm <sup>3</sup> ·cm <sup>-3</sup>
	30-35	114	0.85	0.04	0.86	0.77	0.94	-0.18	-0.65	
	50-55	114	0.88	0.08	0.90	0.38	0.93	-4.27	19.54	
Water content at -1 kPa	0-5	114	0.77	0.07	0.78	0.49	0.92	-1.09	2.87	cm <sup>3</sup> ·cm <sup>-3</sup>
	30-35	114	0.77	0.04	0.76	0.66	0.92	0.44	0.94	
	50-55	114	0.78	0.09	0.79	0.38	0.92	-2.14	6.58	
Water content at -3 kPa	0-5	114	0.68	0.07	0.68	0.43	0.83	-0.92	1.75	cm <sup>3</sup> ·cm <sup>-3</sup>
	30-35	114	0.70	0.05	0.70	0.58	0.90	1.06	1.91	
	50-55	114	0.73	0.09	0.73	0.36	0.89	-1.50	4.20	
Total coprogenous layer thickness	NA	114	43.68	44.92	32.00	0.00	206.00	0.91	0.39	cm
Coprogenous layer thickness	0-160	114	14.54	23.14	0.00	0.00	89.00	1.44	0.94	
Mean fiber content	NA	114	21.14	9.52	20.59	0.00	47.11	0.15	0.53	% (v/v)
Mean rubbed fiber content		114	7.77	4.89	7.38	0.00	28.16	1.32	3.27	
Maximum peat thickness	NA	114	150.32	63.70	158.00	27.00	287.00	-0.05	-0.80	cm

Note: SD, standard deviation; NA, not applicable.