

Evidence-Based User Interface Sanitation Technology Selection for Urban Slums: A Multi-Criteria Analysis; The Case of Jimma Town, Ethiopia

Authors: Donacho, Dereje Oljira, Tucho, Gudina Terefe, Zeine Ousman, Wuhib, Both, Thanyang Koang, and Hailu, Abebe Beyene

Source: Environmental Health Insights, 16(1)

Published By: SAGE Publishing

URL: <https://doi.org/10.1177/11786302221127270>

BioOne Complete (complete.BioOne.org) is a full-text database of 200 subscribed and open-access titles in the biological, ecological, and environmental sciences published by nonprofit societies, associations, museums, institutions, and presses.

Your use of this PDF, the BioOne Complete website, and all posted and associated content indicates your acceptance of BioOne's Terms of Use, available at www.bioone.org/terms-of-use.

Usage of BioOne Complete content is strictly limited to personal, educational, and non - commercial use. Commercial inquiries or rights and permissions requests should be directed to the individual publisher as copyright holder.

BioOne sees sustainable scholarly publishing as an inherently collaborative enterprise connecting authors, nonprofit publishers, academic institutions, research libraries, and research funders in the common goal of maximizing access to critical research.

Evidence-Based User Interface Sanitation Technology Selection for Urban Slums: A Multi-Criteria Analysis; The Case of Jimma Town, Ethiopia

Environmental Health Insights
Volume 16: 1–6
© The Author(s) 2022
Article reuse guidelines:
sagepub.com/journals-permissions
DOI: 10.1177/11786302221127270



Dereje Oljira Donacho^{1,2}, Gudina Terefe Tucho², Wuhib Zeine Ousman², Thanyang Koang Both² and Abebe Beyene Hailu²

¹Department of Health Informatics, Mettu University, Mattu, Ethiopia. ²Department of Environmental Health Science and Technology, Jimma University, Jimma, Ethiopia.

ABSTRACT: Slums are urban areas with insufficient public services and access to sanitation. Evidence-based selection of sustainable sanitation options is critical for addressing the sanitation crisis in slums. This mixed methods study was conducted in Jimma Town, southwest Ethiopia, to assess sanitation status and prioritize sustainable sanitation options for slums. The study was done in 2 phases: quantitative and qualitative. The quantitative cross-sectional household survey aimed to assess sanitation status and the qualitative exploratory method to explore alternative sanitation options and prioritize sustainable alternatives. A total of 310 households were chosen using systematic random sampling methods, of which 302 participated. Data was gathered through interviews, which were supplemented with questionnaires and observation checklists, and 2 focus group discussions (FGD) were held. First, FGD was with expertise in the sanitation sector, and the second was with community members. The state of sanitation was summarized, and multi-criteria analysis (MCA) was used to prioritize sustainable sanitation options. According to our findings, 68% of households had access to improved facilities, and 22.5% didn't have any form of toilet facility. About 7 off-site and on-site user interface sanitation technology options were considered in the selection of alternative sanitation technologies, and each option was evaluated against 17 health, economic, social, technical, and environmental criteria. In the final analysis, the options with the highest scores for the setting were flush to septic tanks, compost toilets, and biogas toilets. Mobilizing such a promising sanitation option is recommended for future interventions.

KEYWORDS: Multi-criteria analysis, selection, sustainable sanitation, urban slum

RECEIVED: March 31, 2022. **ACCEPTED:** August 30, 2022.

TYPE: Original Research

FUNDING: The author(s) received no financial support for the research, authorship, and/or publication of this article.

DECLARATION OF CONFLICTING INTERESTS: The author(s) declared no potential conflicts of interest with respect to the research, authorship, and/or publication of this article.

CORRESPONDING AUTHOR: Dereje Oljira Donacho, Department of Environmental Health Science and Technology, Jimma University, P.O.Box 378 Jimma Oromia, Ethiopia. Email: dodbau3687@gmail.com

Introduction

Sanitation is defined as the access to and use of facilities and services for the safe disposal of human feces and urine.¹ It includes activities aimed at improving and maintaining the basic environmental conditions that affect human well-being.² Sanitation access has several positive effects in terms of health promotion and disease prevention.² Moreover, unfavorable sanitation contributes to the vicious cycle of poverty, resulting in disease, sickness, and poor productivity.³ The magnitude of the problem is more visible in urban slums.⁴ Slums in cities are areas with limited access to sanitation, deplorable living conditions, and dilapidated housing.

Cities currently house more than half of the world's population.⁵ Slum settlements currently host around 1 billion people, accounting for about one-third of the world's urban population, and this number is projected to increase to 3 billion by 2050.^{6,7} The biggest sanitation problems among slums are ways to increase demand for sanitation, resilience, and health hazards since most pathogens are of fecal origin.^{8,9} Human excreta (urine and feces) are not well treated among many slum dwellers.¹⁰ In such a situation, access to and use of sanitation facilities is more in demand than other commodities.

The sanitation system has a flow of step-wise chains, conventionally named the sanitation value chain.¹¹ Following the

sanitation target, hygienic separation of human feces from human contact and user interface sanitation technologies play the lion's share of a direct user interface in the sanitation value chain. Whatever the system, wet or dry, it can be either safe or worrisome.^{3,12} Dry sanitation systems are used in the majority of African countries.¹³ Dry systems do not require water for flushing and include a variety of conventional pit latrines, ventilated improved pits (VIP), and new mechanisms that allow for the safe reuse of excreta.¹⁴ The majority of urban slum dwellers use unimproved sanitation choices like traditional pit latrines, flying toilets (the use of polythene bags for excreta disposal that are poured into the local environment), open field defecation practice, and to a limited extent, VIP, and pour-flush toilets by a few high-income earners.^{15,16} The trends in urban slum growth have been remarkable over the last decade.¹⁷ Limited investments in the sanitation sector appear to have little impact on the access of urban residents who do not have access to the service, which makes it difficult to estimate when they will reach a greater number of people.³ It is very unlikely to obtain sanitation solutions that seem to be suitable for people living in urban slums, especially in low-income countries.

Ethiopia has one of the lowest rates of access to safe sanitation services in Sub-Saharan Africa.¹⁸ Poor sanitation and hygiene are significant contributors to Ethiopia's overall environmental concerns. In 2016, approximately 36% of Ethiopians did not have access to sanitary facilities.¹⁹ In Ethiopia, pit

*Thanyang Koang Both is now affiliated to Nuer Health Office, Gambella Regional Health Bureau, Gambella, Ethiopia.



Creative Commons Non Commercial CC BY-NC: This article is distributed under the terms of the Creative Commons Attribution-NonCommercial 4.0 License (<https://creativecommons.org/licenses/by-nc/4.0/>) which permits non-commercial use, reproduction and distribution of the work without

latrines are the most commonly used alternative. However, different user interface technology options (UIISO) are being used in Ethiopian urban slums,²⁰ which may not be subjected to an evidence-based selection of sustainability criteria.⁸ On the other hand, pit latrines require land space. That is not always sufficient in urban slum settlements. In Ethiopia's urban slums, sanitation has remained a challenge. The choice of the sanitation option is more traditional and does not consider many of the factors. To be a rational decision, every sanitation technology option should be consistent with the principle of completely separating feces from human contact.²¹ Considering various technical perspectives of the sanitation options are more critical to ensuring the sanitation infrastructure's sustainability and well-performing.

MCA is an approach that considers different criteria for different technical choices of sanitation options.^{8,22} The aim is to select evidence-based choices for a particular setting that minimize environmental compliance as well as technically feasible options. Sanitation is a multidimensional issue, and attaining sustainable sanitation in informal settlements, as well as decreasing the considerable challenges connected with sanitation in general, requires evidence-based decisions.²⁰ However, there is a huge gap in assessing slum residents' sanitation practices in most of Ethiopia's rapidly growing towns, particularly Jimma Town. Previous studies in Jimma town show low sanitation access at the town level,²³ but the information on the urban slum is limited. It is, therefore, necessary to illustrate and identify the practice levels, as well as their negative effects on humans and the environment. Thus, this study aimed to examine sanitation practices and prioritize alternative sustainable UIISO for slum dwellers in Jimma town, southwest Ethiopia. The discovery aids sanitation sectors in making evidence-based decisions that facilitate urban sustainable sanitation and the abolition of open-field defecation in urban slums. Moreover, it facilitates choices for urban dwellers to look into the prioritized technology options for their demands.

Methods Materials

Study setting and period

A mixed methods study was conducted from September 2020 to October 2020 in Jimma, about 352 km from Addis Ababa. The town has 195 228 residents,²⁴ and 17 kebeles (ie, the smallest administrative unit in Ethiopia). Jimma town is located in the Oromia Region's special zone. It is located at a latitude of 7°40' north and east longitude of 36°50'. The study was done in 2 phases, quantitative and qualitative. First, the quantitative cross-sectional household survey aimed to assess sanitation status and the qualitative exploratory method to explore alternative sanitation options and prioritize sustainable alternatives for the setting.

Sample size and sampling procedures

Household survey. The sample size was calculated using the single population proportion formula,²⁵ the proportion of

households using improved facilities from the previous report among urban slums in Ethiopia,²⁰ the margin of error at 95% confidence interval, and a design effect of 2, yielding a final sample size of 310 households. However, only 302 households participated in the survey (ie, 8 households were left out after 2 rounds of visits). The kebeles were carefully selected to represent the town's slum conditions. In the household survey, 5 kebeles were used to represent the population under consideration (slum area). Households were randomly selected from slum areas using a systematic random sampling technique. Information was collected from the household heads. To collect data at the household level, interview administered structure questionnaires and observation checklists (Supplemental Table S1) from a similar study that was conducted in the town at the town level were used.²³ To improve the quality of the data, 2 consecutive days of training were given to data collectors before the household survey.

Qualitative. In the FGDs, participants were selected purposefully. The FGDs were held upon participant consent. The user interface sanitation options were listed, and criteria were set by expertise (Supplemental Table S2) and prioritized by the FGDs. The number FGDs was fixed on the base of idea saturation, and 2 FGDs were conducted.

Data processing and analysis

Two approaches were followed in the analysis. First, survey data were entered into Epidata 3.1 software²⁶ and exported to SPSS version 20,²⁷ and frequency and percentage analyses were conducted to identify the socio-demographic status of the study participants, sanitation access, and sanitation options in the study area.

The second, a multi-criteria analysis that was adopted from similar studies,^{28,29} was used for selecting a UIISO. To compile the technology selection, we used an excel-based analysis specifically for this study. It consists of sanitation technology-specific input data and an assessment sheet with technology characteristics adopted from a similar study.²⁸ The selected technologies were screened further by the use of MCA (Figure 1).

The alternative UIISO for excreta disposal was presented to the FGDs for ranking. Two FGDs were held. First, community members based on potential information sources on sanitation schemes in the setting, experience, age, and gender (7 individuals participated). The residents were chosen from 2 neighboring communities: Hermata Mentina and Hermata Merkato. Second, FGD was held with sanitation experts as well as those with experience in the study area and those who are currently employed in various sectors of the town. Health workers, social scientists, and urban planners were specifically chosen. Fourteen experts participated in the ranking of the technically feasible sanitation options. In the FGD, the pair-wise method was used for ranking sanitation technologies. Using this structured method, 7 sanitation technologies were compared, each at a

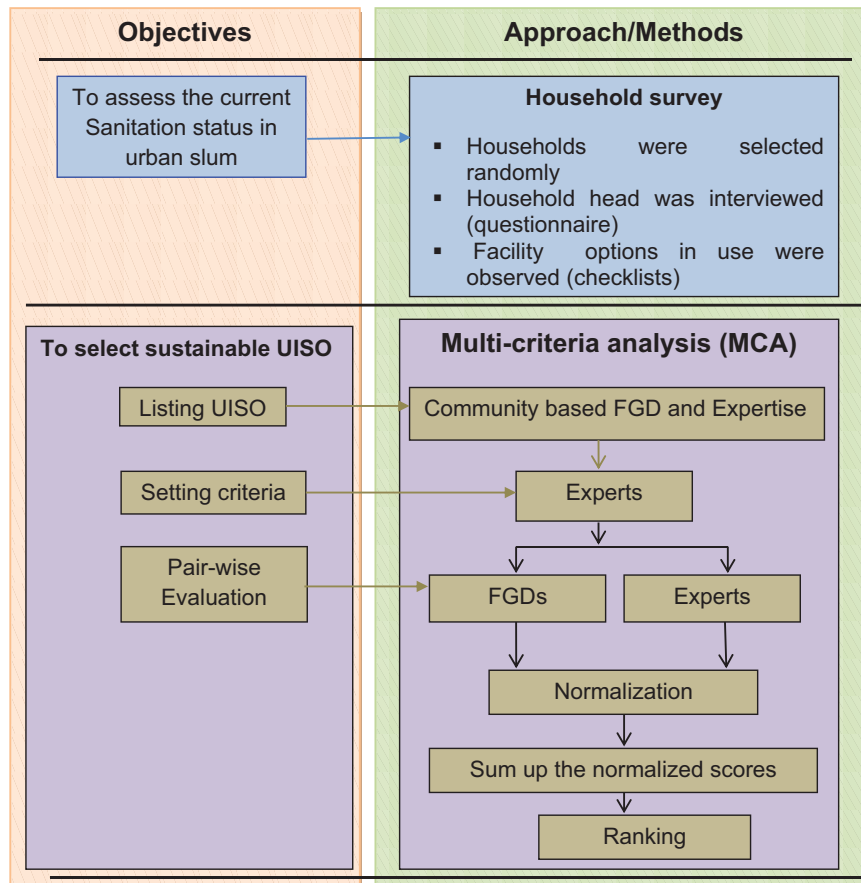


Figure 1. Summary of methods used in this study: MCA.

time, to the 7 technology options. The community-based FGDs were held to establish perceptions and favorites from the communities about the technology options suitable for the study area.

The technologies were presented to the community (represented by FGDs) using IEC (Information, Education, and Communication) materials in a participatory discussion of the merits and demerits of these technologies concerning sustainability indicators before the ranking activity. Individual experts composed of technical and non-technical professionals ranked the technically feasible UISO (Supplemental Table S4).

The final ranking was achieved using the average FGDs scores for the parameters defining sustainability indicators and the weighted scores of the sustainability indicators by the experts. The normalized score of a sustainability indicator was calculated by:

$$F = \sum_{i=1}^n \left(\frac{ai}{c} \right) \times G$$

Where F is the normalized score of a sustainability indicator, n is the number of parameters defining the criteria for a sustainability indicator, a is the average FGD score of a parameter defining a sustainability indicator, and c is the sum of the average FGD scores for the criteria defining a sustainability indicator, and G is

the expert's weighted score for sustainability. The final ranking was based on the sum of the normalized scores (F). This method was adapted from a similar study.⁸

Operational definitions. Sustainable: The definition of sustainable is something that can be continued or a practice that maintains a condition without harming the environment.³⁰ *Improved toilet facilities:* Improved facilities include flush/pour flush toilets connected to piped sewer systems, septic tanks, or pit latrines; pit latrines with slabs (including ventilated pit latrines), and composting toilets.¹

Ethical consideration

Ethical clearance was obtained from the Jimma University Institutional Research Ethics Review Committee, Jimma, Ethiopia. Before each interview, data collectors sought written informed consent from each respondent.

Results

In this study, 310 were approached in the survey, and 302 households participated, yielding a response rate of 97.4%. There were 215 (71.2%) male respondents. The mean age was 38 (SD 10.9), 35% of participants had a bachelor's degree or higher, 178 (58.9%) were married, and nearly half (154, 51%) had a family size of fewer than 5 members (Table 1).

Table 1. Socio-demographic characteristics of study participants among urban slums in Jimma town 2021.

VARIABLES (N=302)	FREQUENCY (%)
Head of household	
Male	215 (71.2)
Female	87(28.8)
Age categories of respondent (mean=37.79, SD= ±10.89)	
18-24	34 (11.25)
25-29	42 (13.9)
30-34	31(10.25)
35-39	60 (19.9)
40-44	59 (19.5)
45 and above	76 (25.2)
Educational status of study participants	
Can read and write	18 (6)
Primary (1-8)	56 (18.5)
Secondary (9-12)	81 (26.8)
Technical (10+)	41 (13.6)
Collage and above	106 (35.1)
Marital status of the respondent	
Married	178 (58.9)
Single	92 (30.5)
Widowed	14 (4.6)
Separated	15 (5.0)
Divorced	3 (1.0)
Occupation of the head of household	
Farmer	7 (2.3)
Government employee	92 (30.5)
Merchant	51 (16.9)
Housewife	65 (21.51)
Privet worker	65 (21.54)
Day laborer	14 (4.65)
Other	8 (2.6)
Family size (mean=5.55)	
Less than five	154 (51.0)
Above five	148 (49.0)
Family monthly income (mean= 11, 896 birrs [230.99\$])	
<7000 Birr (135.92\$)	126 (41.7)
7000 and above Birr (135.92\$)	176 (58.3)

Table 2. Toilet facility options and sanitation conditions among selected households in the urban slum of Jimma town, 2021.

VARIABLES (N=302)	CATEGORIES	FREQUENCY (%)
Do you have a toilet facility?	Yes	234 (77.5)
	No	68 (22.5)
Where are child feces disposed of? (n= 177)	Into toilet	60 (33.9)
	Dumped to open field	78 (44.1)
	With other wastes	37 (20.9)
	Buried	2 (1.1)
Type of toilet facility (n=234)	Flush to a lined pit latrine	50 (21.4)
	Pit latrine	53 (22.6)
	Pipes to a septic tank	88 (37.6)
	Flush discharge somewhere	28 (12.0)
	VIP	15 (6.4)
Does it functional? (n=234)	Yes	122 (52.1)
	No	112 (47.9)
Does any household share your toilet? (n=234)	Yes	135 (57.7)
	No	99 (42.3)
Which toilet did you choose for your family?	Water flush	138 (45.7)
	Ventilated improved pit latrine	94 (31.1)
	Pit with slab	64 (21.2)
	Composting toilet	6 (4)
How important to pay for toilet construction?	Very important	188 (62.30)
	Somewhat important	94 (31.1)
	Not important	16 (5.3)
	Not at all important	4 (1.3)
Type of toilet facilities	Unimproved	96 (31.8)
	Improved	206 (68.2)

Household sanitation access among selected urban slum dwellers

Of the total 302 households included in the current survey, the majority (234 or 77.5%) of the households had at least one type of toilet facility, while the remaining 68, or 22.5%, did not have any form of toilet facility. About 50 (21.4%) are flushed to a lined pit latrine, traditional pit latrine 53 (22.6%), flushed to septic tanks 88 (37.5%), discharged somewhere 28 (12.1%), and VIP 15 (6.4%). More than half of the 206 (68.2%) had access to improved facilities, while 135 (57.7%) shared facilities with 2 or more households. However, of the existing facilities, nearly half of them (47.9%) were not functional as per the observation report in our survey (Table 2).

Table 3. Score based on sustainability criteria for sanitation option and weighted and final rank for an urban slum in Jimma town, 2021 (weighted and final rank).

SANITATION OPTIONS	SCORE BASED ON EACH SUSTAINABILITY CRITERIA FOR SANITATION OPTION (NORMALIZED)					TOTAL SCORE	RANK
	SOCIO-CULTURE (0.13)	TECHNICAL (0.29)	HEALTH AND ENVIRONMENT (0.13)	ECONOMICS (0.29)	INSTITUTIONAL (0.16)		
VIP	0.10	0.13	0.10	0.44	0.12	0.89	6
Compost toilet	0.07	0.23	0.12	1.16	0.12	1.69	2 ^a
Biogas	0.13	0.29	0.10	0.58	0.40	1.50	3 ^a
Flush to septic tanks	0.10	1.02	0.65	1.02	0.10	2.88	1 ^a
Flush with sewer line/ networked	0.11	0.24	0.10	0.44	0.16	1.05	5
Pit latrine with slab	0.05	0.23	0.05	0.29	0.10	0.72	7
UDDT	0.11	0.26	0.13	0.73	0.14	1.37	4

^aFlush to septic tanks, compost toilet, and biogas toilet is 3 alternatives ranked first in the study area.

Sustainable user interface sanitation technology selection

The selection of sanitation technology in this study was made by expert choice based on the scenario of sustainable sanitation options for urban slums. Important components of the sustainability criteria were health benefit, social acceptance, and economic feasibility; availability of skills in the technology; technical feasibility; and ease of expansion (Supplemental Table S3). Different types of user interface sanitation options were considered. A total of 7 sanitation options were evaluated by expertise and FGDs: VIP, compost toilet, biogas toilet, flush to septic tanks, centralized sewer networked toilet, pit latrine, and urine diverting dry toilet (UDDT). The criteria used in the final evaluation were determined from the values given by experts (Supplemental Table S4) and FGDs (Supplemental Table S5). The result of the multi-criteria analysis shows that flushing to septic tanks, compost toilets, and biogas toilets were the 3 top alternatives for this particular study area (Table 3).

Discussion

The current study demonstrated the sanitation status and prioritized the alternative user interface sanitation options for the slum areas of Jimma town. A total of 7 sanitation options were evaluated and ranked.

The finding revealed that most households (77.5%) had at least one form of toilet facility, while 22.5% did not have any toilet facilities. This level of coverage is consistent with findings from a similar study conducted in Addis Ababa.²⁰ Even though more than half of households (68.2%) had access to improved facilities, approximately half (47.9%) of the existing toilet facilities were non-functional, according to the observation, and approximately 57.7% shared facilities between 2 or more households. This finding is higher than that of a similar

survey from Addis Ababa,³¹ in which 94.5% of urban slum dwellers used unimproved toilet facilities. This variation could be attributed to differences in town size as well as intervention in urban slums.

The multi-criteria analysis result showed that flushing to septic tanks, compost toilets, and biogas toilets were the 3 alternatives ranked in the final analysis for this particular study area. Flushing to a septic tank is a user-interface sanitation technology option that supports a safe containment approach because it facilitates the easy emptying of fecal matter; if well designed, it can facilitate onsite treatment. Similar research has found that this technology is a relatively acceptable option in African urban slums.^{8,32} On the other hand, composting toilets and biogas-integrated technologies are resource-conscious options that facilitate nutrient and energy recovery.^{33,34} The biogas toilets have benefits in reducing wood biomass fuel use by bio-gas substitution (reducing deforestation) and enhancing soil amendments through bio-fertilizer; which are resource-oriented options shift the shifts to opportunities. Despite the benefits of those alternatives, they are uncommon in Ethiopia, and many households rely on non-sustainable sanitation alternatives.

The alternative ranked technology options in our case are new for the setting, except for flush to septic tanks, which were in use by a few householders. This requires stakeholders to concentrate their efforts on mobilizing, demonstrating, and assisting the community effort with sustainable sanitation options such as shifting to resource-recovery-oriented sustainable technology, which may lead to a long-term solution to the urban sanitation crisis. Moreover, standardizing the sanitation options specific to the local setting, making regulatory frames for sanitation interfaces, and evidence-based choice may help the sanitation sector to step forward to achieve sustainable development goals targeted in urban sanitation. Furthermore,

in multi-criteria analysis, some options would be better against one criterion but worse against another in the matrix.³⁵ This study handled such cases using weighted ranking, but it is limited in making inter-temporal comparisons of options that point to future work.

Acknowledgements

Jimma University is acknowledged for its financial assistance to data collectors and supervisors in this study. Finally, we'd like to thank the survey participants, as well as the field supervisors, data collectors, and the Jimma Town health departments for their contributions to making this research a reality.

Author Contributions

DO and TK have designed the survey, trained the research team, oversaw the fieldwork, and participated in drafting the manuscript. WZ, AB, and GT participated in the design of the survey, approved the survey, and oversaw the critical revision of the manuscript. All authors read and approved the final version of the manuscript.

Availability of Data and Materials

The datasets used during the current study are available in the manuscript.

Supplemental Material

Supplemental material for this article is available online.

REFERENCES

- UNICEF WHO. *WASH in the 2030 Agenda: New Global Indicators for Drinking Water, Sanitation and Hygiene*. WHO; 2015.
- Mara D, Lane J, Scott B, Trouba D. Sanitation and health. *PLoS Med*. 2010;7:e1000363.
- Katukiza AY, Ronteltap M, Niwagaba CB, Foppen JW, Kansime F, Lens PN. Sustainable sanitation technology options for urban slums. *Biotechnol Adv*. 2012;30:964-978.
- Kamau N, Njiru H. Water, sanitation and hygiene situation in Kenya's urban slums. *J Health Care Poor Underserved*. 2018;29:321-336.
- Gizelis TI, Pickering S, Urdal H. Conflict on the urban fringe: urbanization, environmental stress, and urban unrest in Africa. *Polit Geogr*. 2021;86:102357.
- Nzau B, Trillo C. Affordable housing provision in informal settlements through land value capture and inclusionary housing. *Sustainability*. 2020;12:5975.
- Andersson K, Dickin S, Rosemarin A. Towards "sustainable" sanitation: challenges and opportunities in urban areas. *Sustainability*. 2016;8:1289.
- Katukiza AY, Ronteltap M, Oleja A, Niwagaba CB, Kansime F, Lens PN. Selection of sustainable sanitation technologies for urban slums—a case of Bwaise III in Kampala, Uganda. *Sci Total Environ*. 2010;409:52-62.
- Debelo TH, Beyene A, Tesfahun E, Getaneh A, Gize A, Mekonnen Z. Fecal contamination of soil and water in sub-Saharan Africa cities: the case of Addis Ababa, Ethiopia. *Ecobydrobiol*. 2018;18:225-230.
- Friesen J, Taubenböck H, Wurm M, Pelz PF. The similar size of slums. *Habitat Int*. 2018;73:79-88.
- Singh S, Patro S, Dey S, Mohan RR, Rathi S. *Technology Options for the Sanitation Value Chain*. CSTEP; 2017.
- WSP. Technology Options for Urban Sanitation in India. *Gov India*. September 2008:1-144.
- Semiyaga S, Okure MAE, Niwagaba CB, Katukiza AY, Kansime F. Decentralized options for faecal sludge management in urban slum areas of Sub-Saharan Africa: a review of technologies, practices and end-uses. *Resour Conserv Recycl*. 2015;104:109-119.
- Bain R, Johnston R, Mitis F, Chatterley C, Slaymaker T. Establishing sustainable development goal baselines for household drinking water, sanitation and hygiene services. *Water*. 2018;10:1711.
- Kwiringira J, Atekyereza P, Niwagaba C, et al. Seasonal variations and shared latrine cleaning practices in the slums of Kampala City, Uganda. *BMC Public Health*. 2016;16:361.
- Adubofour K, Obiri-Danso K, Quansah C. Sanitation survey of two urban slum Muslim communities in the Kumasi metropolis, Ghana. *Environ Urban*. 2013;25:189-207.
- Manga M, Bartram J, Evans BE. Economic cost analysis of low-cost sanitation technology options in informal settlement areas (case study: Soweto, Johannesburg). *Int J Hyg Environ Health*. 2020;223:289-298.
- WHO. *Global Health Observatory (GHO) Data Use of Basic and Safely Managed Sanitation Services*. WHO; 2020.
- Central Statistical Agency (CSA) [Ethiopia] and ICF. *Ethiopia Demographic and Health Survey 2016*. CSA and ICF; 2016.
- Biniyam S, Fessahaye A, Tefera B. Sanitation practice and associated factors among slum dwellers residing in urban slums of Addis Ababa, Ethiopia: a community based cross-sectional study. *J Public Health Epidemiol*. 2018;10:370-379.
- WHO. Monitoring Sanitation. *Water Sanit Hyg*. Accessed February 2021:25.
- Torkayesh AE, Rajaeifar MA, Rostom M, et al. Integrating life cycle assessment and multi criteria decision making for sustainable waste management: key issues and recommendations for future studies. *Renew Sustain Energ Rev*. 2022;168:112819.
- Donacho DO, Tucho GT, Hailu AB. Households' access to safely managed sanitation facility and its determinant factors in Jimma town, Ethiopia. *J Water Sanit Hyg Dev*. 2022;12:217-226.
- CSA Ethiopia. *Population Projection at Wereda Level From 2014-2017*. Central Statistical Agency; 2013:118. <https://www.statsethiopia.gov.et/population-projection/>
- Lachenbruch PA, Lwanga SK, Lemeshow S; WHO. *Sample Size Determination in Health Studies: A Practical Manual*. World Health Organization; 1991:86-1149. <https://apps.who.int/iris/handle/10665/40062>
- Lauritsen JM. EpiData (version 3.1). Compr Tool Validated Entry Doc Data. Published online 2004.
- IBM Corp. IBM SPSS Statistics for Windows. Published online Released 2011.
- Vidal B, Hedström A, Barraud S, Kärrman E, Herrmann I. Assessing the sustainability of on-site sanitation systems using multi-criteria analysis. *Environ Sci Water Res Technol*. 2019;5:1599-1615.
- Santos SM, Silva MM, Melo RM, Gavazza S, Florencio L, Kato MT. Multi-criteria analysis for municipal solid waste management in a Brazilian metropolitan area. *Environ Monit Assess*. 2017;189:1-14.
- Anthony DC, Debra RE. Definitions of sustainability. Higher Education Sustainable Overview.
- Adane M, Mengistie B, Kloos H, Medhin G, Mulat W. Sanitation facilities, hygienic conditions, and prevalence of acute diarrhea among under-five children in slums of Addis Ababa, Ethiopia: baseline survey of a longitudinal study. *PLoS One*. 2017;12:e0182783.
- Iwugo KO. Sanitation technology options for developing countries (with special reference to Africa). *Public Health*. 1981;95:189-206.
- Gebrezgabher S, Natarajan H. Biogas from fecal sludge at community scale (Sulabh, India).
- Baker-French J. Diverting waste, conserving natural resources: composting toilets for the new SUB. Published online 2011.
- Torkayesh AE, Malmir B, Rajabi Asadabadi M. Sustainable waste disposal technology selection: the stratified best-worst multi-criteria decision-making method. *Waste Manag*. 2021;122:100-112.